GE

Energy Connections

Model 115MR

Current Transformer
Window Diameter 4.00”

Models 112, 113 and 114 also available as Multi-Ratio.



REGULATORY AGENCY APPROVALS

E93779 LR89403

Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Application

Relaying.

Frequency

50-400 Hz.

Insulation Level

600 Volt, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.

The transformer winding is arranged so that the turns are fully distributed between all taps.

Order mounting bracket kit 0221B01525 separately.


Approximate weight 19 lbs.


Excitation data available upon request.


Model 115MR

Catalog Number	Relay Class	Continuous Thermal Rating Factor	
		@ 30°C	@ 55°C
115-601MR	C50	2.0	1.5
115-122MR	C100	1.33	1.0
115-202MR	C200	1.0	0.8

Model 115MR

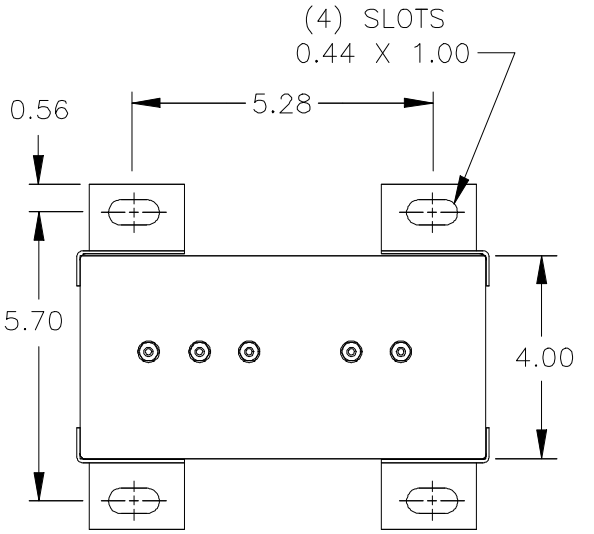

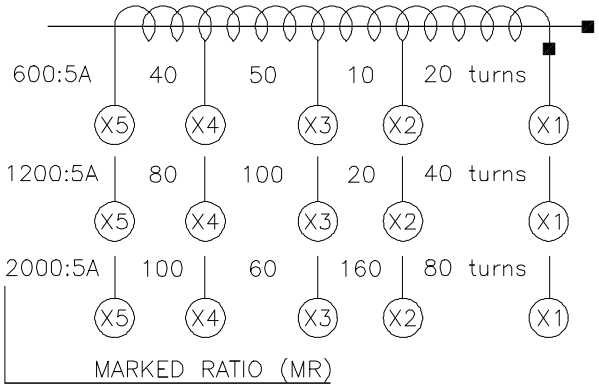

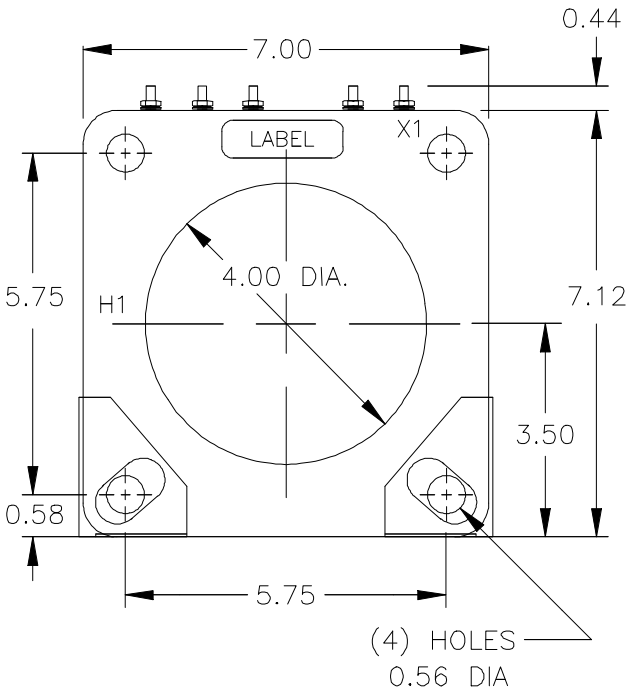

GEGridSolutions.com

Grid-AIS-L4-ITI_Model_115MR-1237-2017_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center
Web: www.GEGridSolutions.com/contact
Phone: +44 (0) 1785 250 070
USA and Canada: +1 (0) 800 547 8629
Europe, Middle East and Africa: +34 (0) 94 485 88 00