


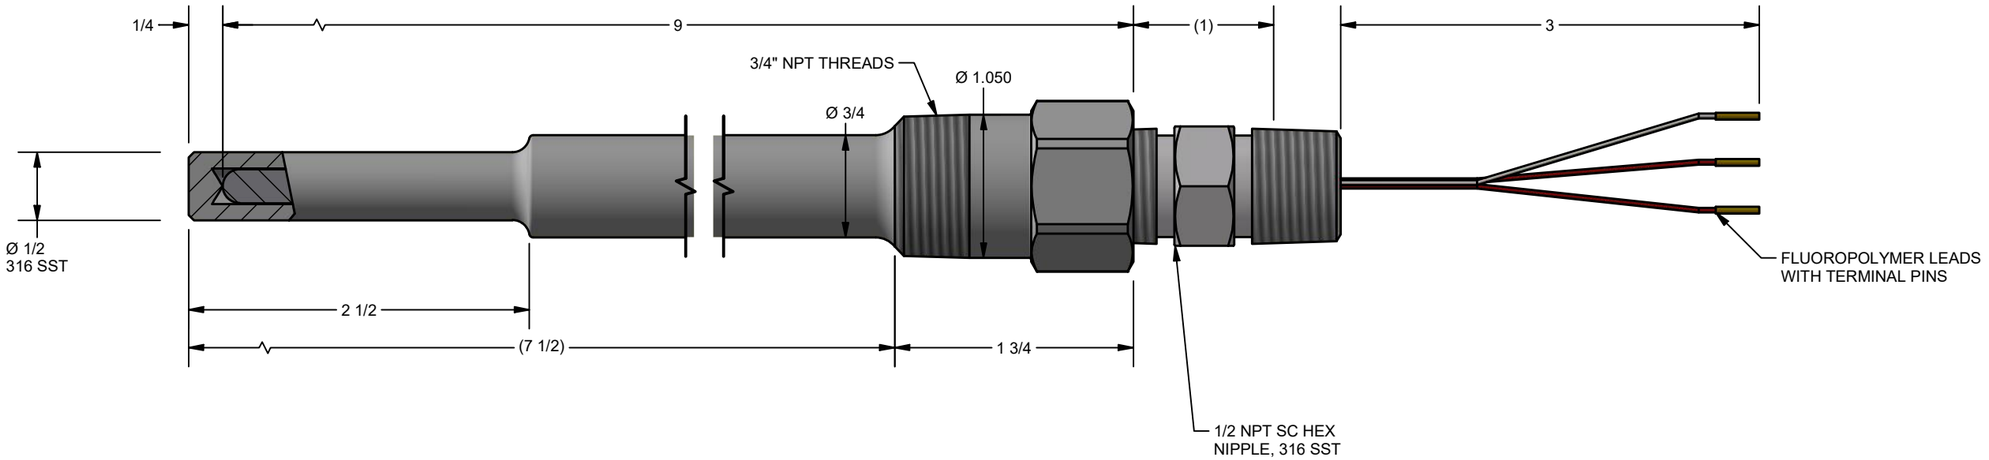

CATALOG #: R1T185H483-S4D0908-SC-8HN22

TAGGING:

STAMPING:

- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Grade B
- Temperature Range -200 to 600 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Duty Threaded (NPT) - 0.260 Bore
- 316 Stainless Steel
- 3/4 Inch NPT Pipe Size
- S Dimension: 9 Inches
- U Dimension: 7(1/2) Inches
- Self-contained Spring-loaded Element
- 1/2 Inch x 1/2 Inch NPT Stainless Steel Hex Nipple
- 3 Inch Individual Leads and Terminal Pins

TOLERANCES

FRACTION DIM =
DECIMAL DIM .XX =
DECIMAL DIM .XXX =
ANGULAR DIM =

This document is PROPRIETARY to Pyromation, Inc.

FOR: PYROMATION

TITLE: SPRING LOADED SENSOR ASSEMBLY

SIZE: B

DWG. NO. & SHEET NO: 10001023112

REV.

DRAWN BY: GP03

DATE: 11/24/2021

pyromation inc
beyond measure
FORT WAYNE, INDIANA 260-484-2580