

TURCK

Network Media Products

FOUNDATION™ fieldbus, (7/8-16UN) *minifast*® Female Receptacles

- Provides Quick Connection to Field Devices
- Available for 1/2-14NPT, 1/2-14NPSM, 3/4-14NPT and M20 Threads



Housing	Part Number	Specs	Application	Pinouts	
18 	RKFV 49-*M/14.5	Nickel Plated CuZn or Stainless Steel 300 V, 9 A -40° to +105°C	1/2-14NPT full length threads	1. BU 2. BN 3. GY 4. GN/YE	Female
20 	RKFV 49-*M/14.75		3/4-14NPT full length threads		
19 	RKFV 49-*M/M20		M20x1.5 threads		
21 	RKFV 49-*M		1/2-14NPSM threads		
22 	RKFV 49-*M/NPT		1/2-14NPT modified length threads		

See page R63 for dimensional drawings.

Standard cable length is 0.3 meters. Consult factory for other lengths.


Receptacles require a 13/16" (21.0 mm) clearance hole for panel mounting.

Standard housing material is stainless steel. "RKF .."; indicates 316 nickel plated brass housing.

For locknuts to be included, add "W/LN" to the end of the part number.

minifast® Female Receptacles


18

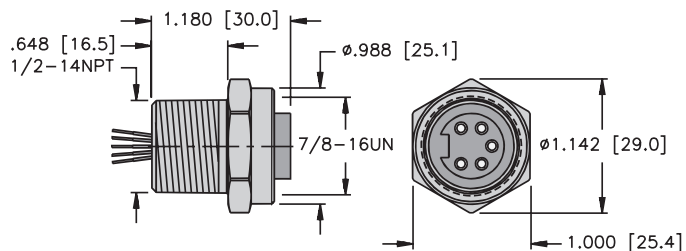

RKFV .. 14.5

Page R59


20

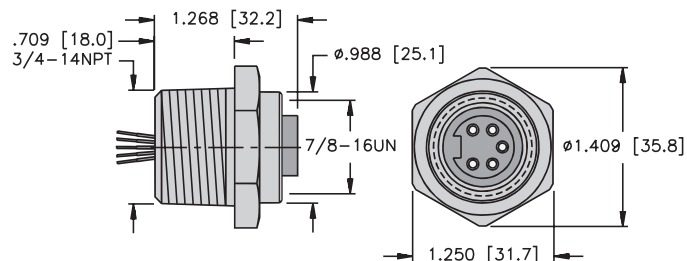

RKFV .. 14.75

Page R59


19

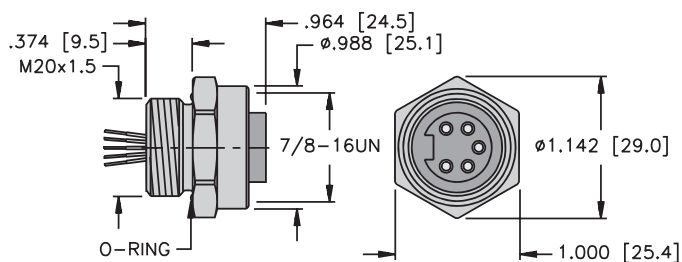

RKFV .. M20

Page R59


21

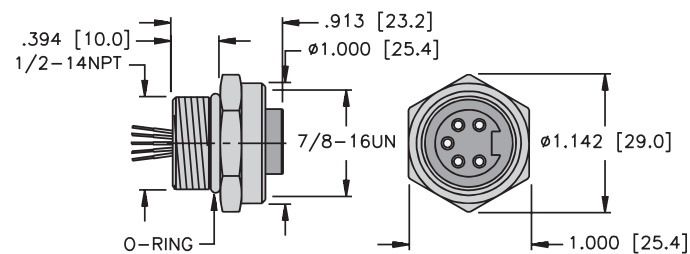

RKFV ..

Page R59

22

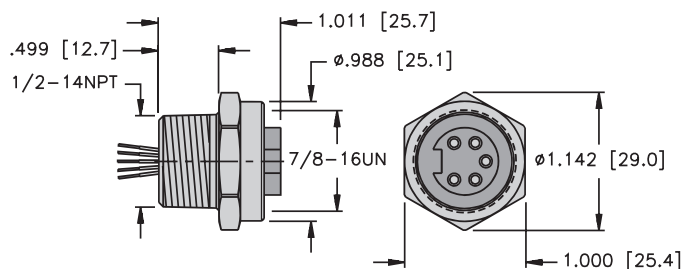

RKFV .. NPT

Page R59