


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 V
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	POLYOLEFIN
NUMBER OF CONDUCTORS [AWG]	8x24 AWG, SOLID (CAT 5e)
SHIELD	INTER-LOCKING ALUMINUM ARMOR
TEMPERATURE RANGE	-20°C to +75°C (-4°F to +167°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68

MALE END VIEW	FEMALE END VIEW

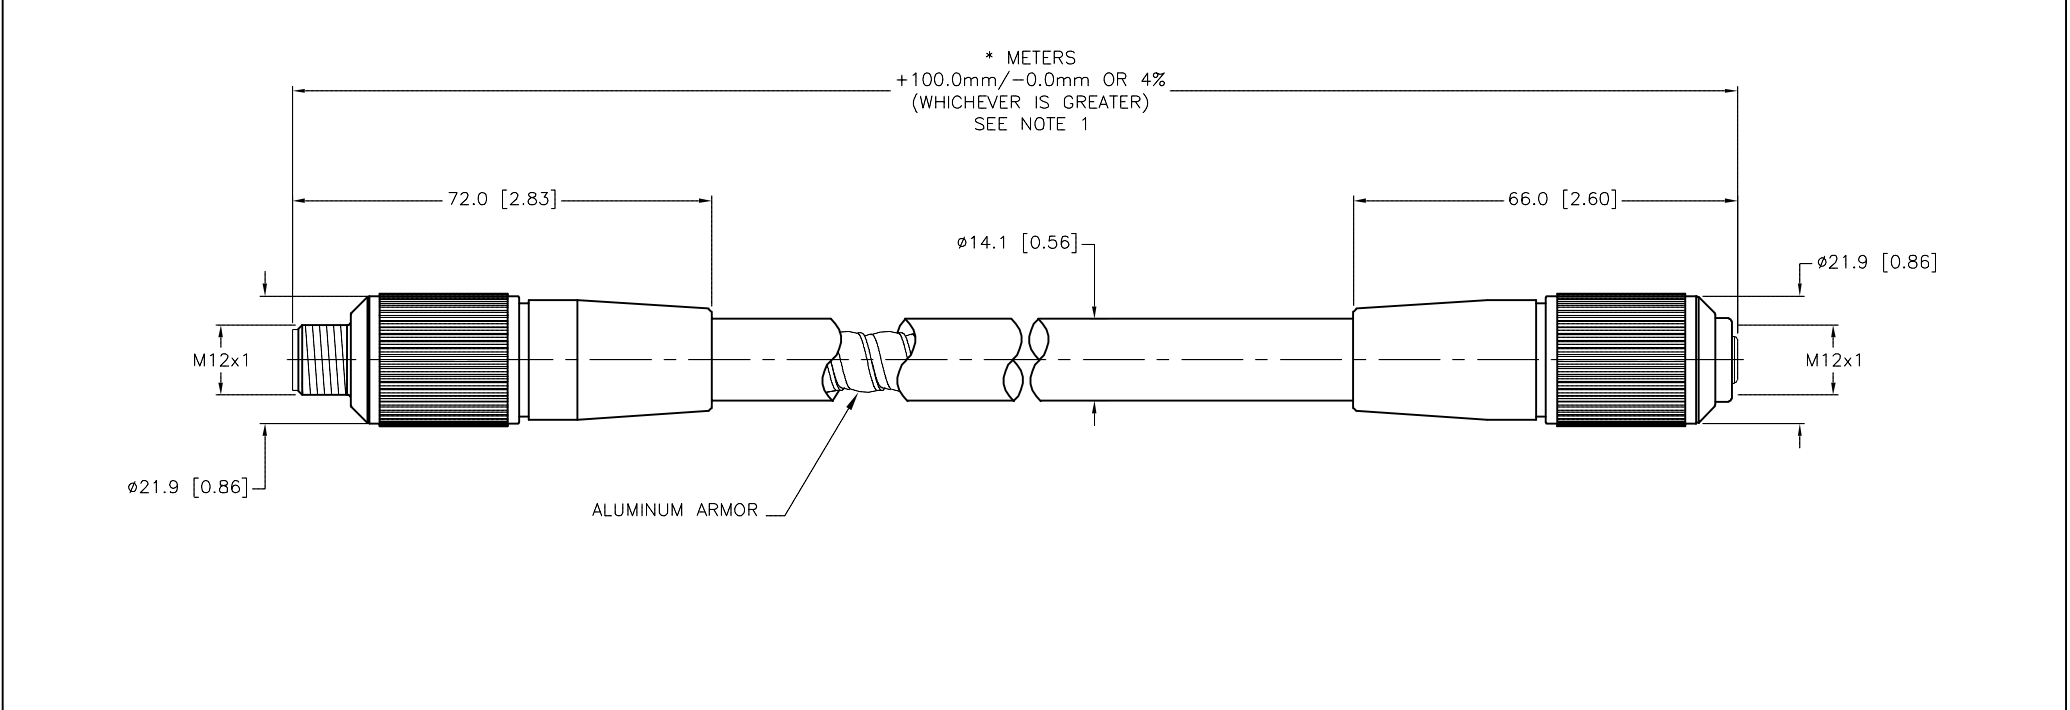

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				1. 2. 3. 4.				DRFT RDS		DATE 09/06/05	
2. CABLE ARMOR IS CONNECTED TO THE COUPLING NUT(S).				MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE 1=1.3	
				FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
				SEE SPECIFICATIONS				MILLIMETER [INCH]		RSKV RKAV 849A-*M	
				SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
										REV	
										G	
										FILE: 777011725	
										SHEET 1 OF 1	

G	ADD ARMOR NOTE	RDS	09/22/11	36423
REV	DESCRIPTION	BY	DATE	ECO NO.