
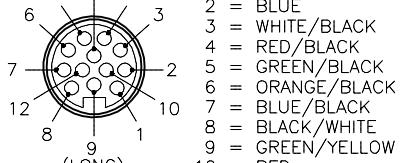
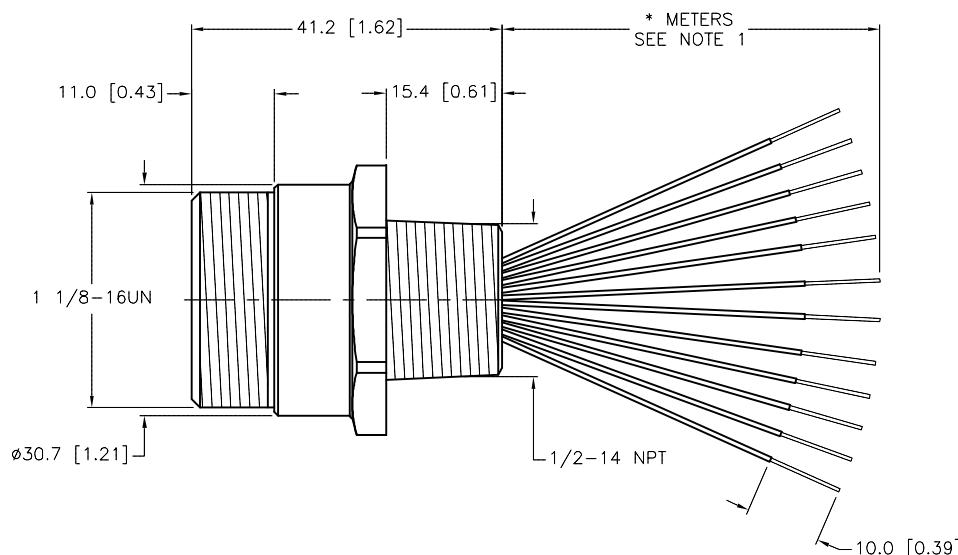


MALE END VIEW	
 <b>mini fast</b>	1 = ORANGE 2 = BLUE 3 = WHITE/BLACK 4 = RED/BLACK 5 = GREEN/BLACK 6 = ORANGE/BLACK 7 = BLUE/BLACK 8 = BLACK/WHITE 9 = GREEN/YELLOW 10 = RED 11 = WHITE 12 = BLACK

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	7.0 A
RATED VOLTAGE [V]	600 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	12x16 AWG
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

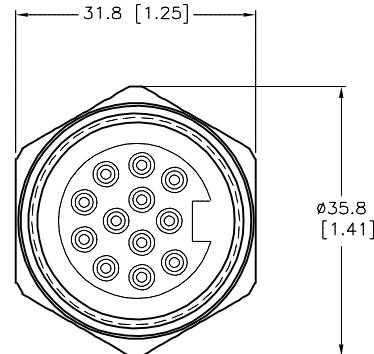

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

G	UPDATE GREEN WIRE TO GREEN/YELLOW	TR	10/04/17	62351
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		DESCRIPTION	
1.	2.		DRFT	RDS	DATE 07/17/03	RSF 126-*M/14.5/NPT
3.	4.		APVD	SCALE 1=1.0		
SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		
FINISH		SEE SPECIFICATIONS		MILLIMETER [ INCH ]		IDENTIFICATION NO. REV G
DO NOT SCALE THIS DRAWING						FILE: 777002456
						SHEET 1 OF 1