


CONFIDENTIAL: This document/program, including the content, is property of Emerson Process Management and must be held in strict confidence and properly safeguarded by the recipient at all times. It may not be copied or reproduced, or provided or revealed to any other part, except with prior authorization of an appropriate officer of Emerson Process Management and any authorised copy or reproduction must include this admonition. The recipient may use the same only for the purpose for which Emerson Process Management has provided it to the recipient. The document must be returned to Emerson Process Management upon request. By accepting this document/program, the recipient agrees to the foregoing.

PART NUMBER	PART NAME	IDENTIFICATION	NUMBER REQUIRED	REMARKS	
1006-XXXXX	SENSOR ASSEMBLY	SENSOR NUMBER 1	SEE NOTE 1	200-10,000 OULET PRESSURE RANGE	SEE TABLE I & II
1007-XXXXX	SENSOR ASSEMBLY	SENSOR NUMBER 2	SEE NOTE 1	50-6000 & 25-4000 OULET PRESSURE RANGE	SEE TABLE I & II
1008-XXXXX	SENSOR ASSEMBLY	SENSOR NUMBER 3	SEE NOTE 1	15-2500 OUTLET PRESSURE RANGE	SEE TABLE I & II
1009-XXXXX	SENSOR ASSEMBLY	SENSOR NUMBER 4	SEE NOTE 1	10-1500, 0-800 & 0-500 OUTLET PRESSURE RANGE	SEE TABLE I & II
1049	SPRING	OLIVE DRAB	SEE NOTE 3	0-500 OUTLET PRESSURE RANGE	SEE TABLE III
1050	SPRING	IRIDESCENT YELLOW	SEE NOTE 3	25-4000 & 0-800 OUTLET PRESSURE RANGE	SEE TABLE III
1051	SPRING	SILVER	SEE NOTE 3	50-6000, 15-2500 & 10-1500 OUTLET PRESSURE RANGE	SEE TABLE III
8515-*	HOLE PLUG		SEE NOTE 2		
60522	INSTRUCTIONS				

## KIT NUMBER DESIGNATION

ASSEMBLY DATE: \_\_\_\_\_  
 OLDEST CURE DATE: \_\_\_\_\_  
 WARNING: THE PARTS IN THIS KIT  
 MUST BE CLEANED, LUBRICATED  
 AND INSTALLED FOLLOWING THE  
 OPERATION AND SERVICE MANUAL.

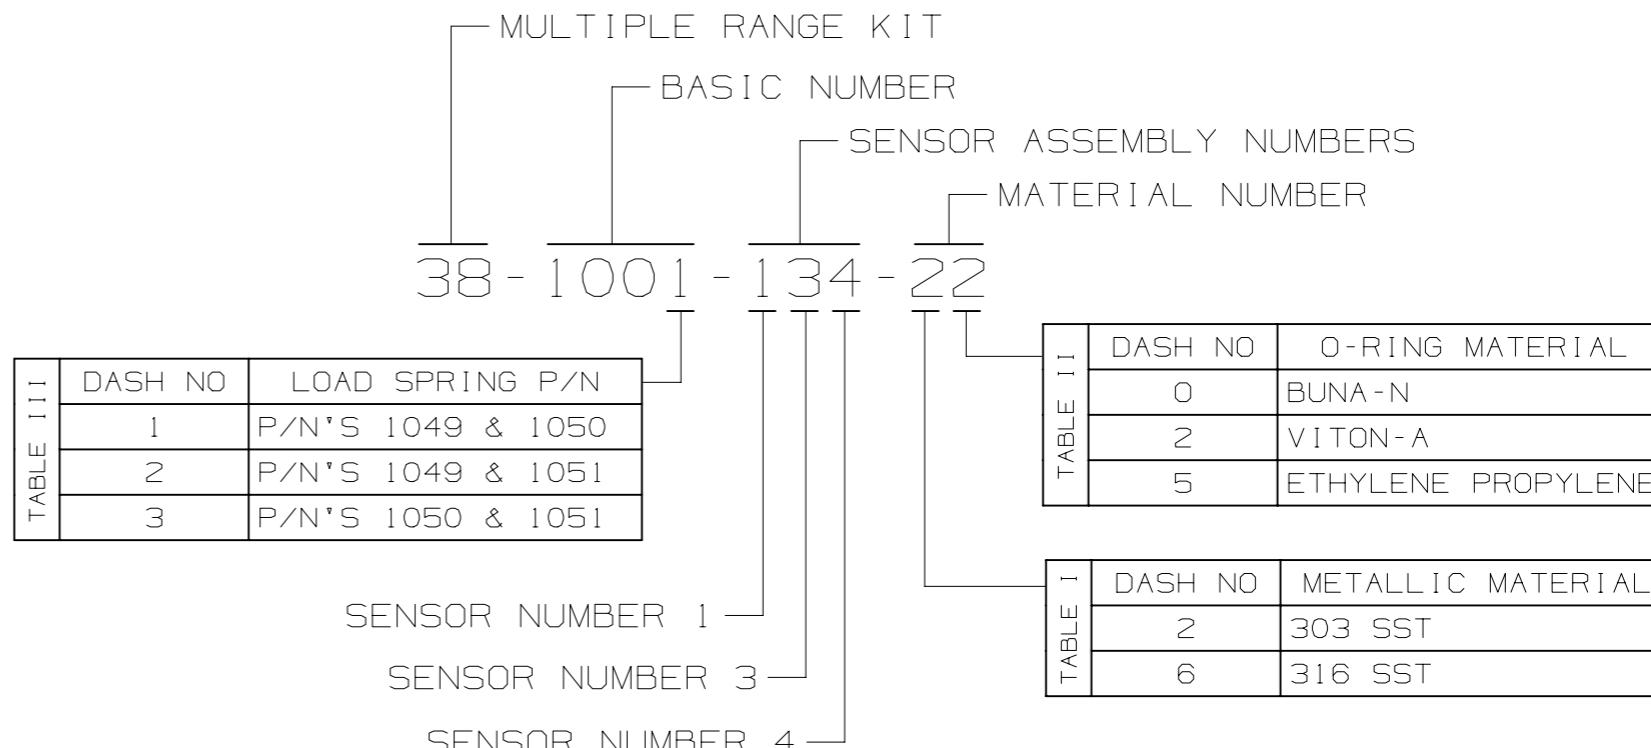

### NOTES:

1. 3 SENSOR ASSEMBLIES PER KIT (REFER TO KIT NUMBER DESIGNATION FOR APPROPRIATE SENSOR ASSEMBLY NUMBERS).

2. \*-1 HOLE PLUG PER EACH MAX OUTLET PRESSURE THAT WILL BE NEEDED WITH SPRING & SENSOR COMBINATION. 10,000, 6,000, 4,000, 2,500, 1,500, 800, 500.

3. 2 SPRINGS PER KIT (REFER TO KIT NUMBER DESIGNATION FOR APPROPRIATE SPRING PART NUMBERS).

UNLESS OTHERWISE SPECIFIED TOLERANCE: $\pm 0.25$ ANGLES: $\pm 1^\circ$ SURFACE FINISH: 2.5 Ra BREAK SHARP CORNERS: 0.5 MAX DO NOT SCALE THIS DWG	 EMERSON	MULTIPLE RANGE KIT 26-1000				
© 1998 2018	PROJECT: SHEET: 1 OF 1 SCALE: 1:1					
REVISION: ECRN NO: 50413-18	UNITS: MILLIMETERS	DWN: dhanson	27-Sep-2013		DRAWING	REV
CHANGES:	ASME Y14.5M	CHK: eburgett	30-Sep-2013			
APV BY: wrbock 28-Apr-2018	DWG STATUS:	APV: eburgett	30-Sep-2013	38-100X	NE	