









2, 3 and 5-Wire Cordsets, Large Plug Body

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 250 V, 4 A

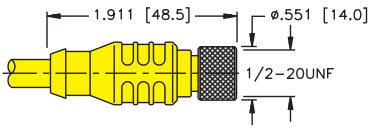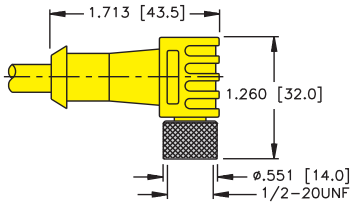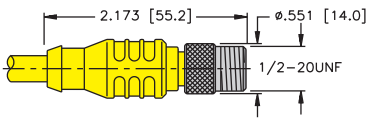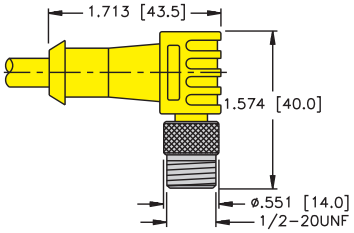

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
KBE ..** 	KBE 2T-* WKBE 2T-*	SBE 2T-* WSBE 2T-*	AWM PVC Yellow, 2x18 AWG, 105°C, 7.2 mm OD, Cable #RF50511-*M†, *flexlife*®	1. BN 2. BU	Female  Male 
WKBE ..** 	KBE 3T-* WKBE 3T-*	SBE 3T- WSBE 3T-*	AWM PVC Yellow, 3x18 AWG, 105°C, 7.2 mm OD, Cable #RF50520-*M†, *flexlife*	1. GN 2. RD/BK 3. RD/WH	Female  Male 
	KBE 3T-*/S600 WKBE 3T-*/S600	SBE 3T-*/S600 WSBE 3T-*/S600	SJOOW CPE Yellow, 3x18 AWG, 105°C, 8.0 mm OD, Cable #RF50658-*M†, Weld Flash Immune, Flame Immune		
SBE ..** 	KBE 3T-*/S1587 WKBE 3T-*/S1587	SBE 3T-*/S1587 WSBE 3T-*/S1587	AWM TPE Yellow, 3x18 AWG, 105°C, 7.2 mm OD, Cable #RF50957-*M†, Weldlife, Weld Flash Immune		
	KBE 5T-* WKBE 5T-*	SBE 5T-* WSBE 5T-*	AWM PVC Yellow, 5x18 AWG, 105°C, 7.2 mm OD, Cable #RF50521-*M†, *flexlife*	1. RD/WH 2. RD/BU 3. GN 4. RD/OG 5. RD/BK	Female  Male 
WSBE ..** 	KBE 5T-*/S600 WKBE 5T-*/S600	SBE 5T-*/S600 WSBE 5T-*/S600	SJOOW CPE Yellow, 5x18 AWG, 105°C, 9.3 mm OD, Cable #RF50659-*M†, Weld Flash Immune, Flame Immune		
	KBE 5T-*/S1587 WKBE 5T-*/S1587	SBE 5T-*/S1587 WSBE 5T-*/S1587	AWM TPE Yellow, 5x18 AWG, 105°C, 7.2 mm OD, Cable #RF50958-*M†, Weldlife, Weld Flash Immune		

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
** KBE large plug body has no stainless steel or nylon options.
† See Section N for ***reelfast***® cable information.