



TURCK Valve Connector Products

Valve Connectors, Type "A" (18 mm) Extensions


- **eurofast[®] and picofast[®] Connectors**
- **Wired for Use with Junction Box**
- **2 Conductors + Ground (eurofast), Ground Contacts Parallel Wired**

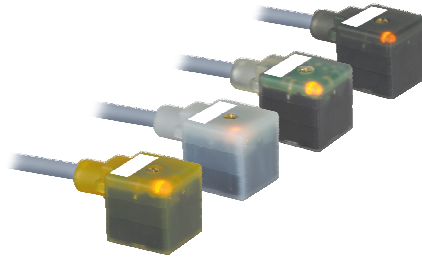


"A" Style Valve Connectors, eurofast Extension

eurofast Extension

Application	Cable Specs	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV**	Indicator LED and Diode - DC only
Standard duty PVC	3/18 AWG Grey PVC 105°C 6.2 mm OD	0-220 24-48 110-220	VAS 22-A653-*M-RS 5.3T - - - - - - - -	- - - - VAS 22-B653-*M-RS 5.3T VAS 22-C653-*M-RS 5.3T	- - - - VAS 22-D653-*M-RS 5.3T VAS 22-E653-*M-RS 5.3T	- - - - VAS 22-F653-*M-RS 5.3T - - - -
Standard duty TPU	3/18 AWG Grey TPU 80°C 6.0 mm OD	0-220 24-48 110-220	VAS 22-A669-*M-RS 5.3T - - - - - - - -	- - - - VAS 22-B669-*M-RS 5.3T VAS 22-C669-*M-RS 5.3T	- - - - VAS 22-D669-*M-RS 5.3T VAS 22-E669-*M-RS 5.3T	- - - - VAS 22-F669-*M-RS 5.3T - - - -
Rubber	3/18 AWG Yellow CPE SJOOV 105°C 8.0 mm OD	0-220 24-48 110-220	VAS 22-A654-*M-RSE 5.3T - - - - - - - -	- - - - VAS 22-B654-*M-RSE 5.3T VAS 22-C654-*M-RSE 5.3T	- - - - VAS 22-D654-*M-RSE 5.3T VAS 22-E654-*M-RSE 5.3T	- - - - VAS 22-F654-*M-RSE 5.3T - - - -



picofast Snap Extension




picofast Threaded Extension

"A" Style Valve Connectors, picofast Extension

Application	Cable Specs	Voltage VAC/DC	Straight Wired	Indicator LED	Indicator LED and MOV	Indicator LED and Diode - DC only
Small diameter, PVC Snap lock	3/24 AWG Yellow PVC 105°C 4.4 mm OD	0-125 24-48 110-220	VAS 22-A642-*M-PSG 3 - - - - - - - -	- - - - VAS 22-B642-*M-PSG 3 - - - -	- - - - VAS 22-D642-*M-PSG 3 - - - -	- - - - VAS 22-F642-*M-PSG 3 - - - -
Small diameter, TPU Snap lock	3/24 AWG Black TPU 80°C 4.2 mm OD	0-125 24-48 110-220	VAS 22-A587-*M-PSG 3 - - - - - - - -	- - - - VAS 22-B587-*M-PSG 3 - - - -	- - - - VAS 22-D587-*M-PSG 3 - - - -	- - - - VAS 22-F587-*M-PSG 3 - - - -
Small diameter, PVC Threaded	3/24 AWG Yellow PVC 105°C 4.4 mm OD	0-125 24-48 110-220	VAS 22-A642-*M-PSG 3M - - - - - - - -	- - - - VAS 22-B642-*M-PSG 3M - - - -	- - - - VAS 22-D642-*M-PSG 3M - - - -	- - - - VAS 22-F642-*M-PSG 3M - - - -
Small diameter, TPU Threaded	3/24 AWG Black TPU 80°C 4.2 mm OD	0-125 24-48 110-220	VAS 22-A587-*M-PSG 3M - - - - - - - -	- - - - VAS 22-B587-*M-PSG 3M - - - -	- - - - VAS 22-D587-*M-PSG 3M - - - -	- - - - VAS 22-F587-*M-PSG 3M - - - -

* Length in meters


Type "A" (18 mm) Valve Connector to *eurofast* Extension

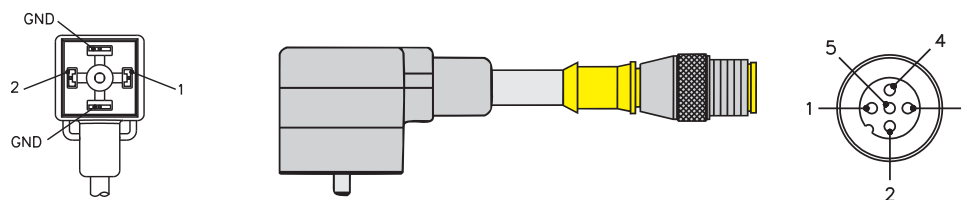

Wiring Diagrams

Straight Wired (A)	Indicator LED (B, C)	Indicator LED and MOV (D, E)	Indicator LED and Diode - DC (F)

Type "A" (18 mm) Valve Connector to *picofast* Extension

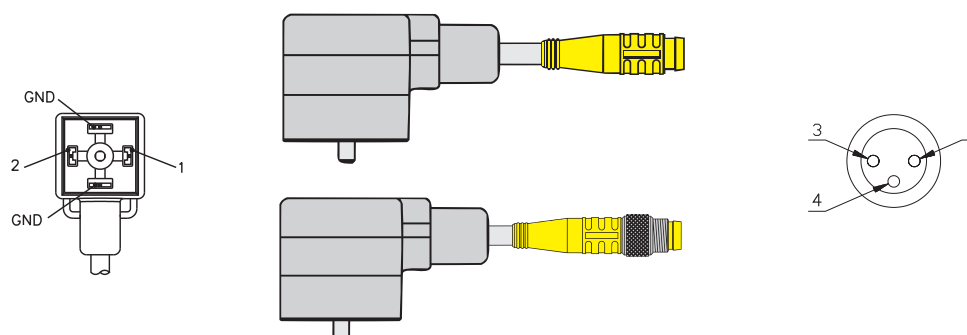

Wiring Diagrams

Straight Wired (A)	Indicator LED (B, C)	Indicator LED and MOV (D, E)	Indicator LED and Diode - DC (F)