

VT Series

3-Way On/Off and Shut-off Valves

DVTXX2016X012

Specifications

For other materials or modifications, please consult TESCO.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Operating Pressure

3500 psig / 241 bar

Body: Brass, 316 Stainless Steel

Seat: Tefzel® ETFE, CTFE

6000 psig / 414 bar

Body: Brass

Seat: Vespe®l®, PEEK

10,000 psig / 690 bar

Body: 316 Stainless Steel

Seat: Vespe®l®, PEEK

Design Proof Pressure

150% maximum rated

Leakage

Internal: Bubble-tight

External: Bubble-tight

Operating Temperature

See Part Number Selector

Flow Capacity

$C_v = 0.75$

Actuation Pressure

Minimum: 80 psig / 5.5 bar

Maximum: 110 psig / 7.6 bar



TESCOM VT Series 3-way air-operated valve provides high cycle life in a compact design.

Applications

- Component pressure cycle testing
- Two source selector valve
- Fill and dump applications (e.g. airbag canister filling, gas spring filling)
- Emergency shutoff
- Pneumatic and hydraulic applications

Features and Benefits

- 1/4" and 3/8" ports
- $C_v = 0.75$
- Balanced main valve
- Solenoid valve is optional
- 2 position, 3-way
- Leak tight integrity - Class VI shutoff (bubble-tight)

MEDIA CONTACT MATERIALS

Body

Brass, 316 Stainless Steel

Metallic Trim

316 Stainless Steel, 17-4 Stainless Steel, Brass (Brass bodies only)

Seat

Tefzel® ETFE, CTFE, PEEK, Vespe®l®

O-Ring

Buna-N, Kalrez®, Viton®, Ethylene Propylene (E.P.), Urethane

Back-up Rings

Teflon® for CTFE and Tefzel® seats

CTFE for PEEK and Vespe®l® seats



OTHER

Weight



5 lbs / 2.3 kg

Teflon®, Kalrez®, Tefzel®, Vespe®l® and Viton® are registered trademarks of E.I. du Pont de Nemours and Company.

VT Series 3-Way Valve Drawing

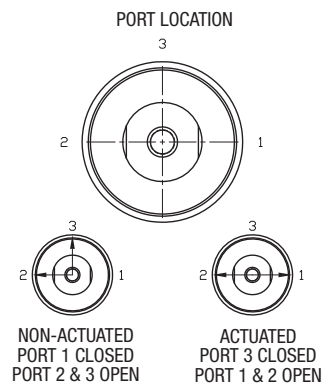
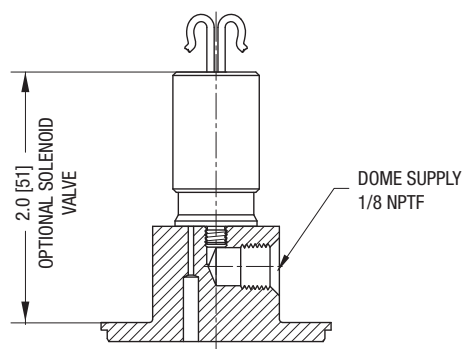


**NON-ACTUATED
PORT 1 CLOSED, PORT 2 & 3 OPEN**

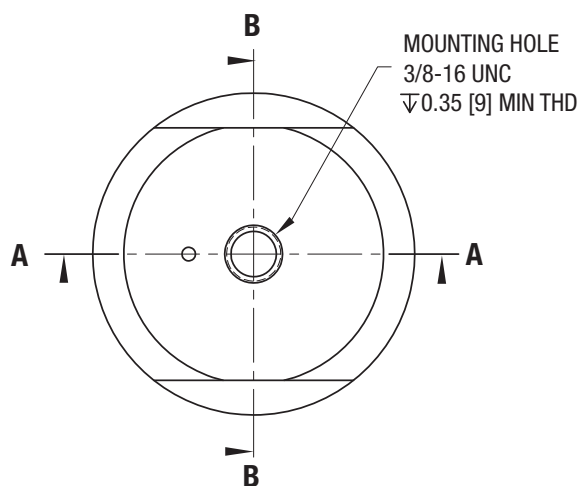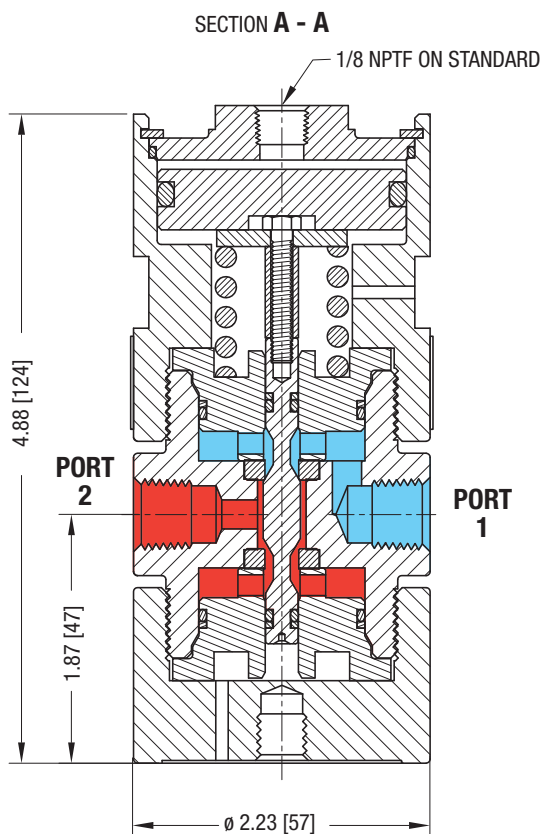



All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets

VT Series 3-Way Valve Drawing

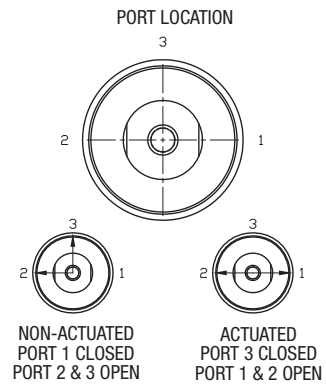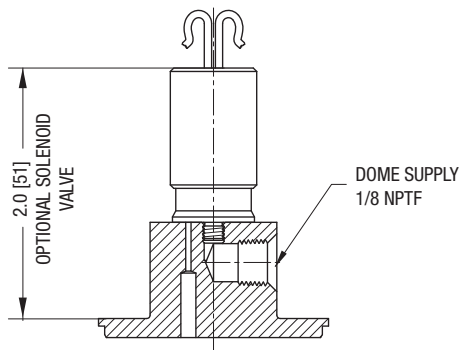

**NON-ACTUATED
PORT 1 CLOSED, PORT 2 & 3 OPEN**

SECTION B - B

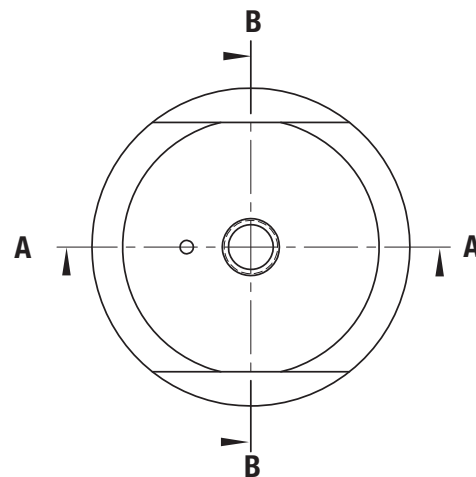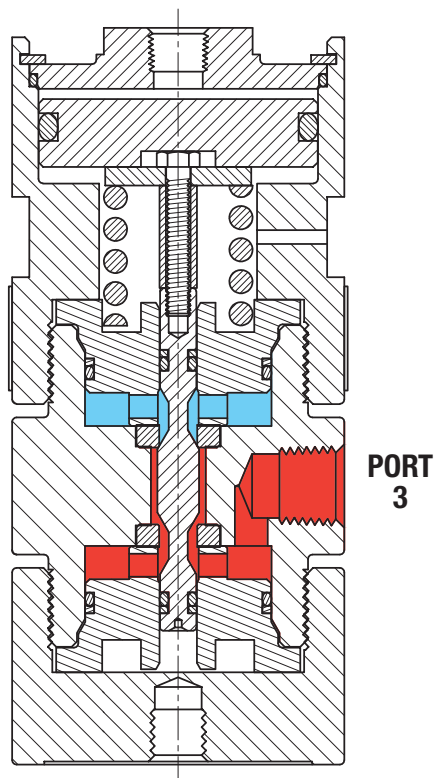

*All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets*

VT Series 3-Way Valve Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

VT	6	AB				9	A	A	A
BASIC SERIES	BODY MATERIAL	SEAT MATERIAL	O-RING MATERIAL	MAXIMUM OPERATING PRESSURE	OPERATING TEMPERATURE	OPTIONS	1 PORT LOCATION SIZE AND TYPE	2 PORT LOCATION SIZE AND TYPE	3 PORT LOCATION SIZE AND TYPE
VT	1 – Brass 6 – 316 Stainless Steel	AB – Tefzel® ETFE	Buna-N	Brass body 3500 psig 241 bar	-40°F to 165°F -40°C to 74°C	9 – None C – CCL V – Solenoid valve 24 Volt DC W – Solenoid valve 12 Volt DC	A – 1/4" NPTF C – 3/8" NPTF E – 1/4" SAE J – 3/8" SAE	A – 1/4" NPTF C – 3/8" NPTF E – 1/4" SAE J – 3/8" SAE	A – 1/4" NPTF C – 3/8" NPTF E – 1/4" SAE J – 3/8" SAE
		AK – Tefzel® ETFE	Kalrez®		20°F to 250°F -7°C to 121°C				
		AV – Tefzel® ETFE	Viton®		-15°F to 250°F -26°C to 121°C				
		AE – Tefzel® ETFE	E.P.		-40°F to 250°F -40°C to 121°C				
		AU – Tefzel® ETFE	Urethane		-40°F to 165°F -40°C to 74°C				
		CB – CTFE	Buna-N	Brass body 3500 psig 241 bar	-40°F to 165°F -40°C to 74°C				
		CK – CTFE	Kalrez®		20°F to 165°F -7°C to 74°C				
		CV – CTFE	Viton®		-15°F to 165°F -26°C to 74°C				
		CE – CTFE	E.P.		-40°F to 165°F -40°C to 74°C				
		CU – CTFE	Urethane		-40°F to 165°F -40°C to 74°C				
		PB – PEEK	Buna-N	Brass body 6000 psig 414 bar	-40°F to 165°F -40°C to 74°C				
		PK – PEEK	Kalrez®		20°F to 250°F -7°C to 121°C				
		PV – PEEK	Viton®		-15°F to 250°F -26°C to 121°C				
		PE – PEEK	E.P.		-40°F to 250°F -40°C to 121°C				
		PU – PEEK	Urethane		-40°F to 165°F -40°C to 74°C				
		VB – Vespel®	Buna-N	Brass body 6000 psig 414 bar	-40°F to 165°F -40°C to 74°C				
		VK – Vespel®	Kalrez®		20°F to 250°F -7°C to 121°C				
		VV – Vespel®	Viton®		-15°F to 250°F -26°C to 121°C				
		VE – Vespel®	E.P.		-40°F to 250°F -40°C to 121°C				
		VU – Vespel®	Urethane		-40°F to 165°F -40°C to 74°C				



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the *TESCOM Safety, Installation and Operation Precautions*.

DVTXX2016X012 © 2012 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 05/2012.

Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.