



TURCK works Industrial Automation


3-Wire Cordsets, Standard

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 9 A

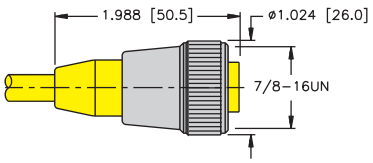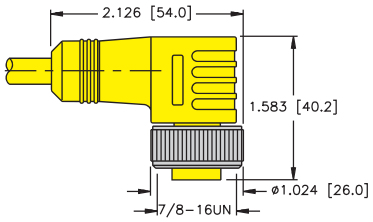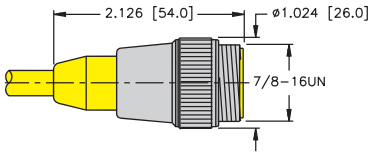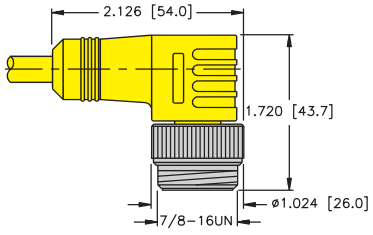


Connector Style	Female Part Number	Male Part Number	Features	Pinout
RKM ..** 	RKM 311-*M/X0R/S620 WKM 311-*M/X0R/S620	RSM 311-*M/X0R/S620 WSM 311-*M/X0R/S620	AWM Irradiated PVC Yellow, 3x18 AWG, 80°C, 5.7 mm OD, Cable #RF04159-*M†, Weld Resistance, 300V	1. GN 2. RD 3. RD/WH
WKM ..** 	RKM 31-*M WKM 31-*M	RSM 31-*M WSM 31-*M	ITC/PLTC PVC Yellow, 3x18 AWG, 105°C, 6.2 mm OD, Cable #RF50513-*M†, flexlife, 600V	1. BK 2. BN 3. BU
RSM ..** 	RKM 31-*M/S600 WKM 31-*M/S600	RSM 31-*M/S600 WSM 31-*M/S600	SJOOW CPE Yellow, 3x18 AWG, 105°C, 8.0 mm OD, Cable #RF50654-*M†, Weld Flash Immune, Flame Immune, 300V	
WSM ..** 	RKM 31-*M/S816 WKM 31-*M/S816	RSM 31-*M/S816 WSM 31-*M/S816	ITC PVC Yellow, 3x22 AWG , 105°C, 5.1 mm OD, Cable #RF52087-*M†, flexlife, 300V	

Female



Male



* Length in Meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters. Consult factory for other lengths.

** Standard coupling nut material is nickel plated brass "RKM .."; "RK .." indicates nylon, "RKV .." indicates stainless steel, and "RKVH .." indicates stainless steel hex.

† See Section N for ***reelfast***® cable information.