


eurofast[®] Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 68 Protection




Housing Style	Part Number	Lead Specs	Features	Pinout
2	P-FS 4-*	UL, CSA 3x18 AWG 105°C 250 V, 4 A	PG 9 Threads, Front Panel Mount	1. BU 2. BN 3. N/C 4. GN/YE
	P-FS 4D-*	UL, CSA 4x18 AWG 105°C 250 V, 4 A	PG 9 Threads, Front Panel Mount, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE

See [page K27](#) for dimensional drawings.

* Length in meters. Standard lead length is 0.5 meters. Consult factory for other lengths.
 Housing material listed is nickel plated brass "P-FS."; "P-FSV.." indicates 316 stainless steel.
 Note: See **TURCK** Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at www.turck.com/fmcd for guidance on installation in hazardous locations.

euromast® Receptacles with Leads, 2-Wire Analog or HART Control Circuits


1

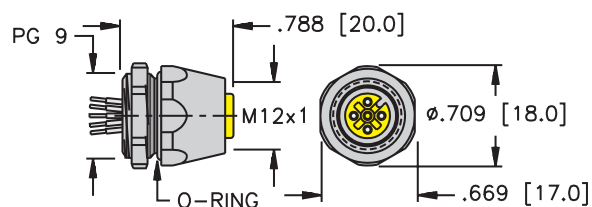

P-FK ..

Page K29


2

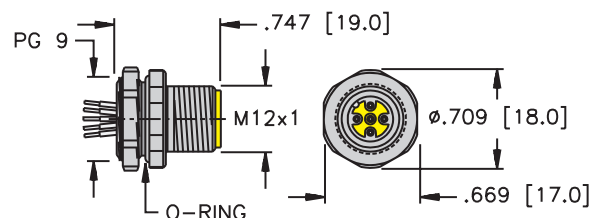

P-FS ..

Page K30


3

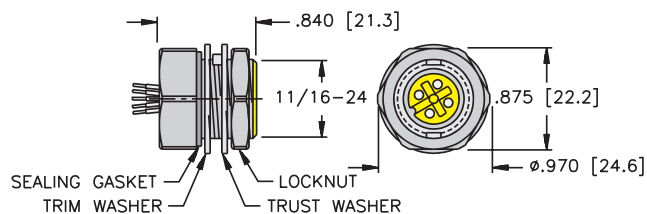

P-FKP ..

Page K29


4

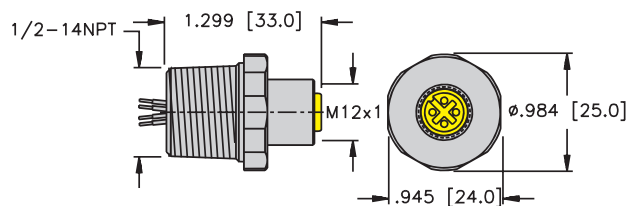

P-FK ../14.5/NPT

Page K31

5

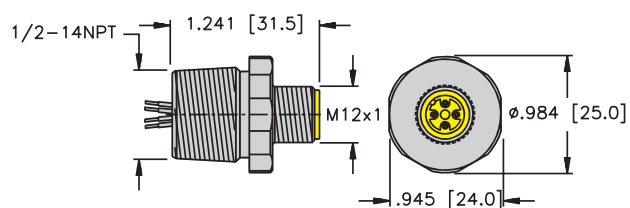

P-FS ../14.5/NPT

Page K32