



Technical data

Cable length (L)	0.5 m, (+50mm or 4% of length/-0.0, Whichever is greater)
Conductor material	TC (tinned copper)
Conductor insulation material	PVC
Conductor size	22 AWG [Similar to 0.34 mm²]
Conductor colors	BN, WH, BU, BK, GY
Electrical properties at +20 °C	
Rated voltage	250 V _{AC} /300 V _{DC}
Current	4 A
Mechanical and chemical properties	
Ambient temperature range (static)	-40 °C...+105 °C
Approvals	UL 2238 CSA C22.2 No. 182.3 CE RoHS
Note	
- We reserve the right to make technical alterations without prior notice.	


Mounting hole - Through

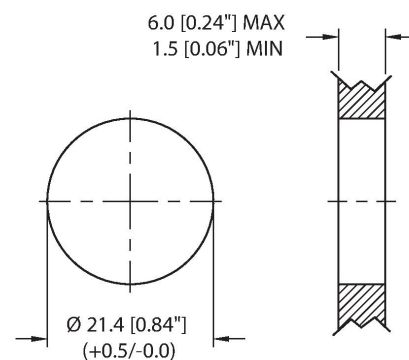

Mounting hole - Threaded

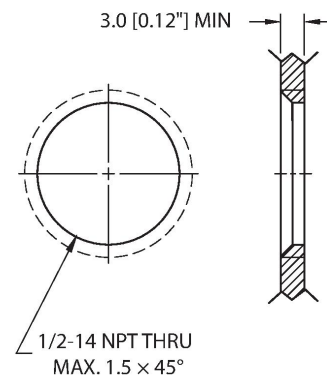


Front panel mounting

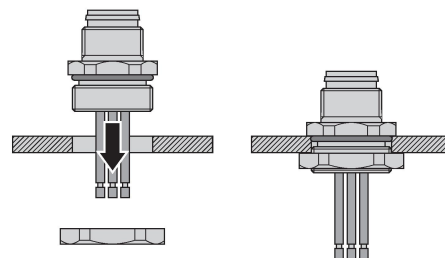


Accessories


M12-GASKET-M20,1/2NPT-(10/BAG) 100024930

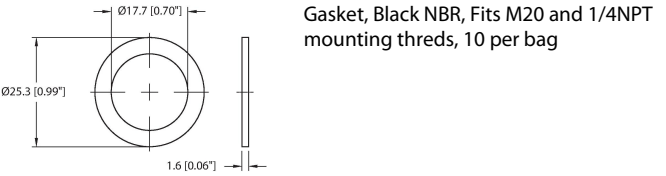

LOCKNUT-1/2NPT-BRASS-(10/BAG) 100024931

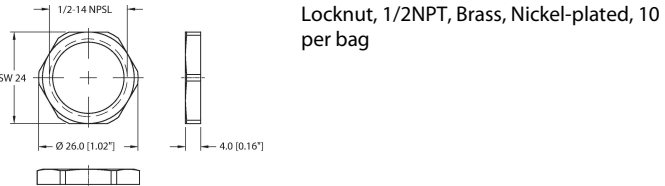

DECAL,9-CLRS,RECEPT+BOXES,EURO(QTY1) 100008955

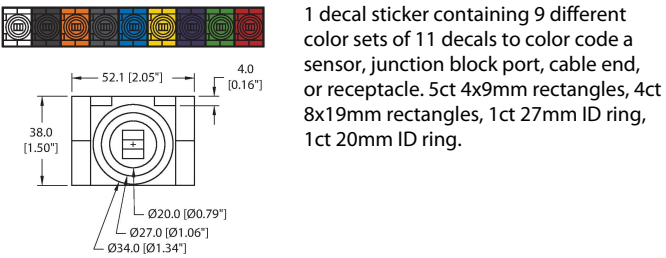

ORING-Ø7x1.5-M12-(10/BAG) 100024937

