


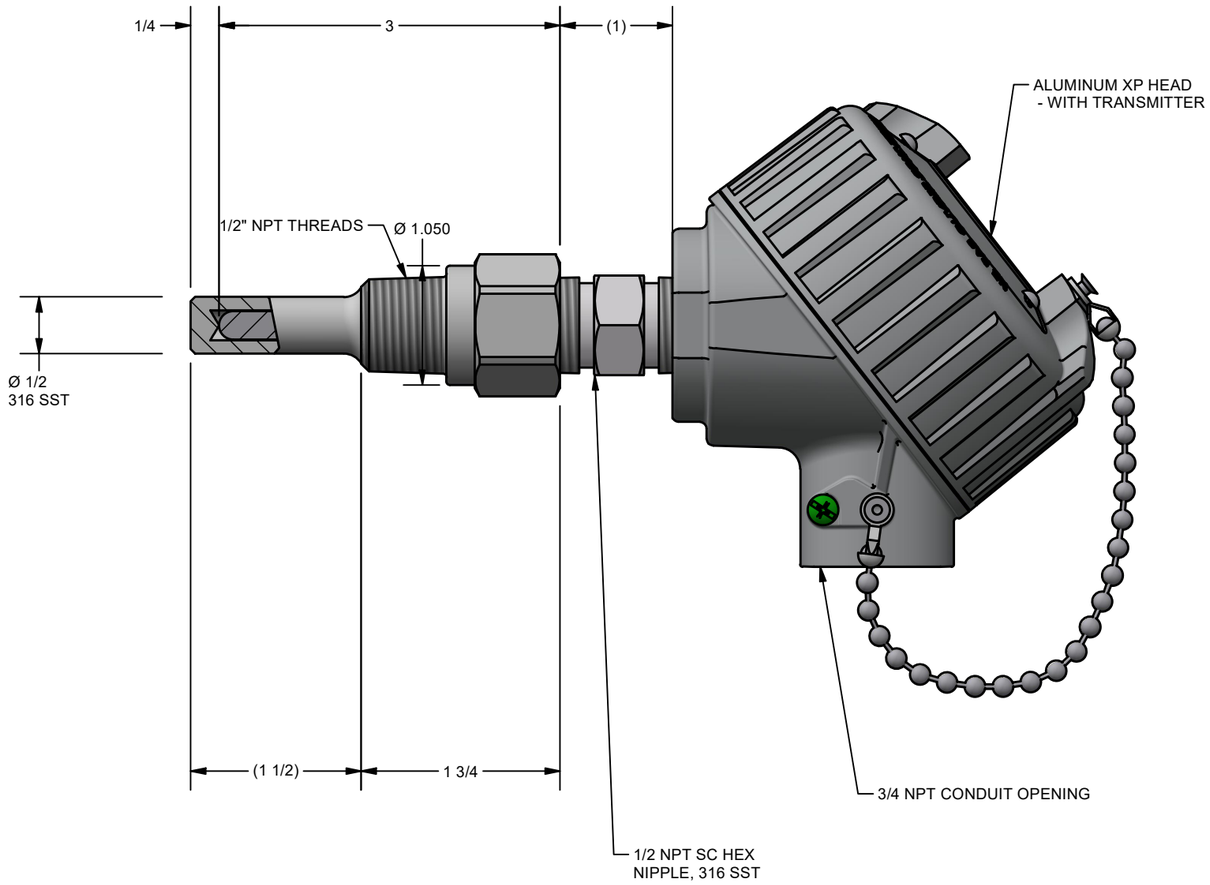

- FM/CSA Explosion Proof Approved Assembly
- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Grade B
- Temperature Range -200 to 600 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Duty Threaded (NPT) - 0.260 Bore
- 316 Stainless Steel
- 1/2 Inch NPT Pipe Size
- S Dimension: 3 Inches
- U Dimension: 1(1/2) Inches
- Self-contained Spring-loaded Element
- 1/2 Inch x 1/2 Inch NPT Stainless Steel Hex Nipple
- Aluminum Explosion/ Flame Proof Head
- Series 440 (4 to 20) mA Programmable Temperature Transmitter
- Unconfigured

CATALOG #: XP-R1T185H483-S4C0308-SC-8HN93,T-440-00

TAGGING:

STAMPING:

	FOR: PYROMATION
	TITLE: SPRING LOADED SENSOR ASSEMBLY
TOLERANCES	SIZE: B / DWG. NO. & SHEET NO: 10386000149 / REV.
FRACTION DIM =	DRAWN BY: XP03 / DATE: 03/17/2022
DECIMAL DIM .XX =	
DECIMAL DIM .XXX =	
ANGULAR DIM =	

This document is PROPRIETARY to Pyromation, Inc.

pyromation inc. beyond measure
FORT WAYNE, INDIANA 260-484-2580