


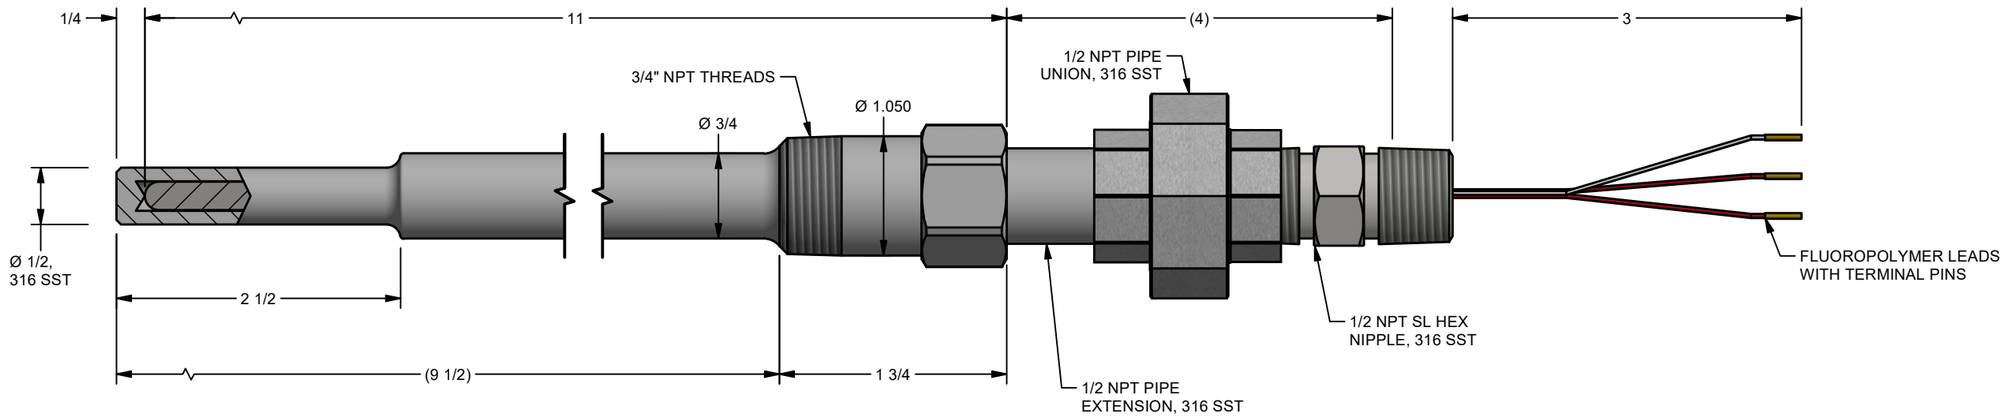

TAGGING:

STAMPING:

- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Grade B
- Temperature Range -200 to 600 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Duty Threaded (NPT) - 0.260 Bore
- 316 Stainless Steel
- 3/4 Inch NPT Pipe Size
- S Dimension: 11 Inches
- U Dimension: 9(1/2) Inches
- Spring-loaded Element
- 1/2 Inch NPT Stainless Steel Union/Nipple
- Extension E Length: 4 Inches
- 3 Inch Individual Leads and Terminal Pins

CATALOG #: R1T185H483-S4D1108-SL-8PU422

	FOR: PYROMATION
	TITLE: SPRING LOADED SENSOR ASSEMBLY
	SIZE: B / DWG. NO. & SHEET NO: 10386000218 / REV.
TOLERANCES	
FRACTION DIM = DECIMAL DIM .XX = DECIMAL DIM .XXX = ANGULAR DIM =	DRAWN BY: GP03 / DATE: 10/19/2022
This document is PROPRIETARY to Pyromation, Inc.	pyromation inc. beyond measure FORT WAYNE, INDIANA 260-484-2580