
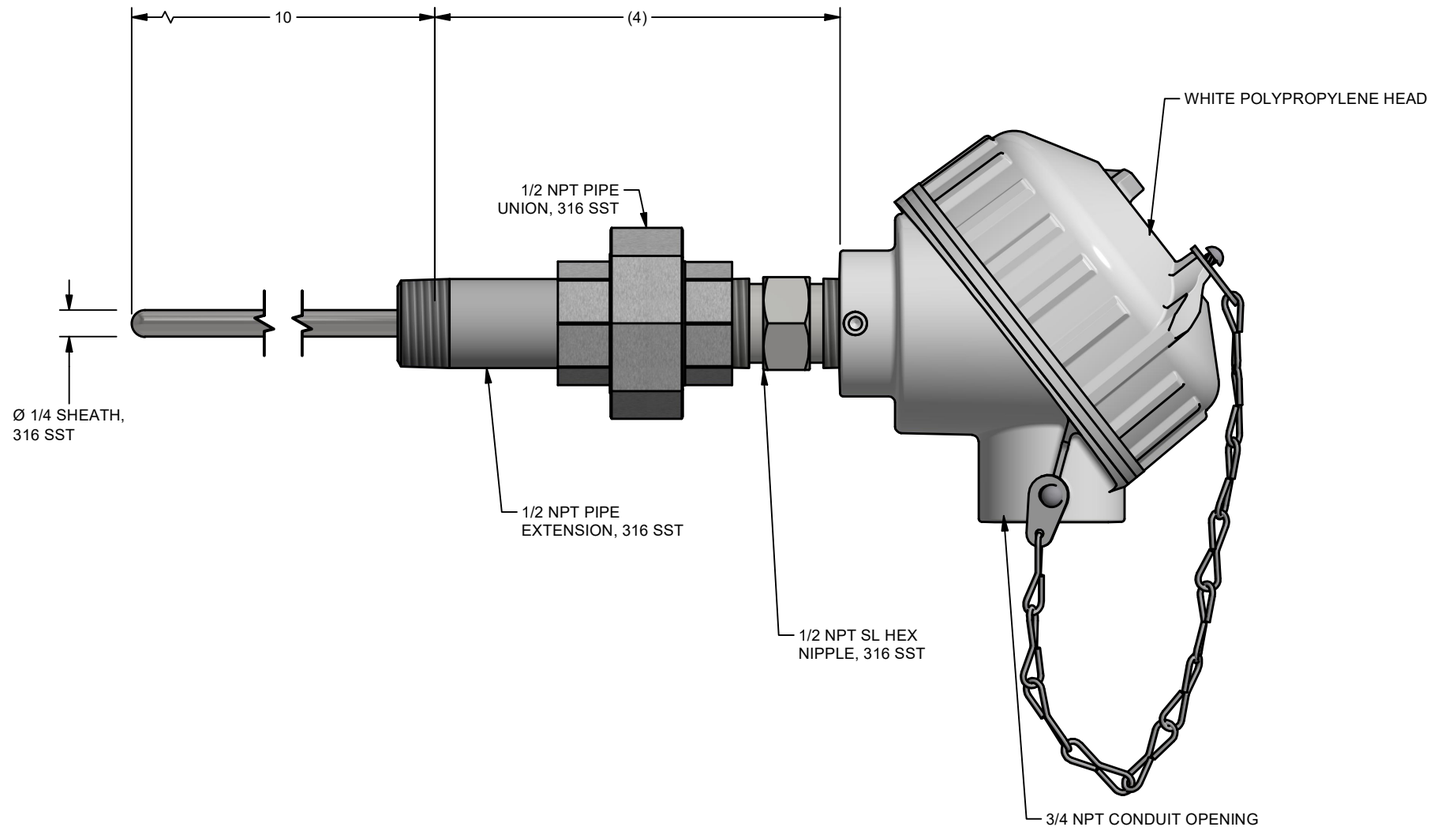




TAGGING:

STAMPING:

- Dual Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Class A
- Temperature Range -30 to 200 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Sheath Length: 10 Inches
- Spring-loaded Element
- 1/2 Inch NPT Stainless Steel Union/Nipple
- Extension E Length: 4 Inches
- White Polypropylene Head

CATALOG #: RAF285L483-010-SL-8PU463

	FOR: PYROMATION
	TITLE: SPRING LOADED SENSOR ASSEMBLY
TOLERANCES	SIZE: B; DWG. NO. & SHEET NO: 10386000221; REV.
FRACTION DIM = DECIMAL DIM .XX = DECIMAL DIM .XXX = ANGULAR DIM =	DRAWN BY: GP03; DATE: 11/17/2022
This document is PROPRIETARY to Pyromation, Inc.	pyromation inc. beyond measure FORT WAYNE, INDIANA 260-484-2580