


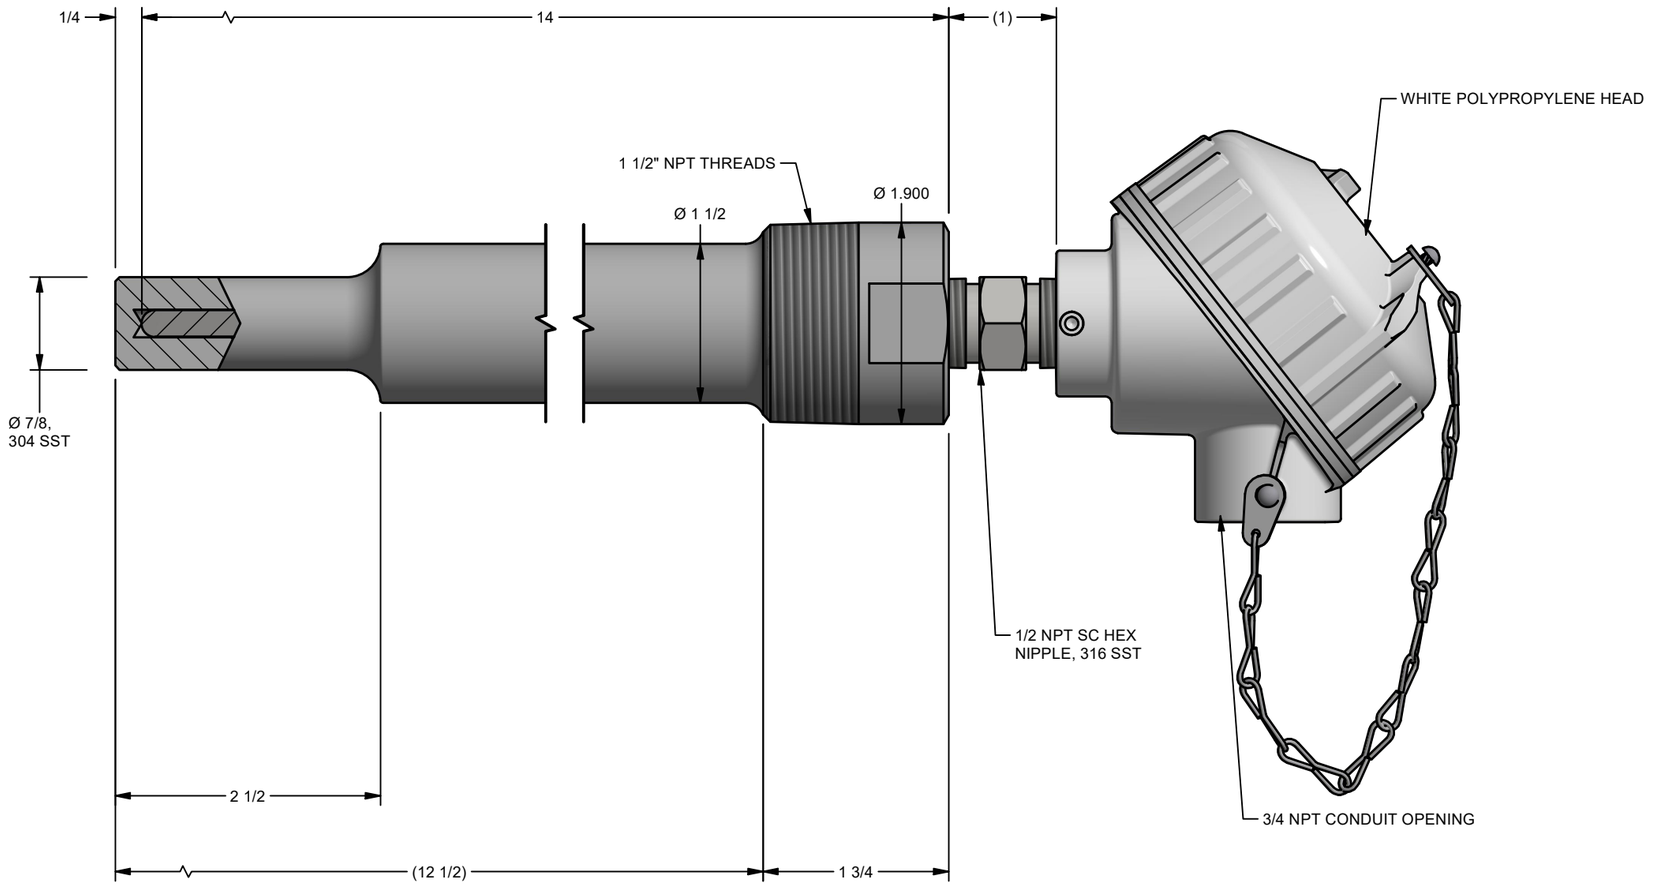

TAGGING:

STAMPING:

- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Class B
- Temperature Range -50 to 200 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Duty Threaded (NPT) - 0.260 Bore
- 304 Stainless Steel
- 1(1/2) Inch NPT Pipe Size
- S Dimension: 14 Inches
- U Dimension: 12(1/2) Inches
- Self-contained Spring-loaded Element
- 1/2 Inch x 1/2 Inch NPT Stainless Steel Hex Nipple
- White Polypropylene Head

CATALOG #: RBF185L483-S4G1409-SC-8HN63

	FOR: PYROMATION	
	TITLE: SPRING LOADED SENSOR ASSEMBLY	
TOLERANCES	SIZE: B	DWG. NO. & SHEET NO: 10386000226 REV.
FRACTION DIM = DECIMAL DIM .XX = DECIMAL DIM .XXX = ANGULAR DIM =	DRAWN BY: GP03	DATE: 12/9/2022
This document is PROPRIETARY to Pyromation, Inc.	pyromation inc. beyond measure FORT WAYNE, INDIANA 260-484-2580	