
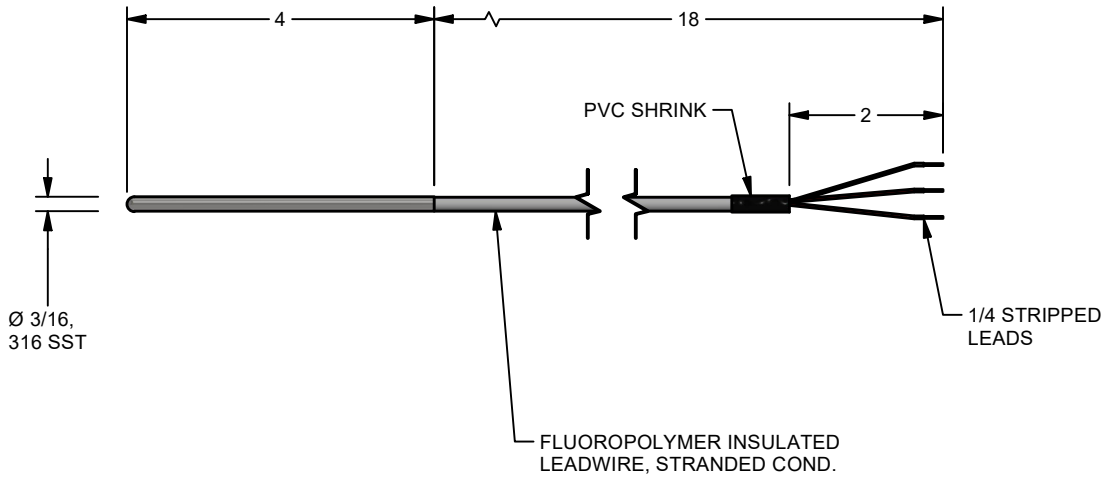




- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Class B
- Temperature Range -50 to 200 Degrees C
- 3/16 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Sheath Length: 4 Inches
- No Fitting or Bend
- Same Size Transition without Heat Shrink Tubing 400 Degrees F
- Leadwire - Fluoropolymer Insulation - Stranded Conductor
- Extension Wire B Length: 18 Inches
- 2 Inch Split Leads 1/4 Inch Stripped

TAGGING:

CATALOG #: RBF185L383-004-00-18-T3018-2

		FOR: PYROMATION	
		TITLE: RTD ASSEMBLY	
TOLERANCES		SIZE: A	DWG. NO. & SHEET NO: 10001031908
FRACTION DIM =		DRAWN BY: RT01	DATE: 1/19/2023
DECIMAL DIM .XX =			
DECIMAL DIM .XXX =			
ANGULAR DIM =			

This document is PROPRIETARY to Pyromation, Inc.

pyromation inc. beyond measure
FORT WAYNE, INDIANA 260-484-2580