


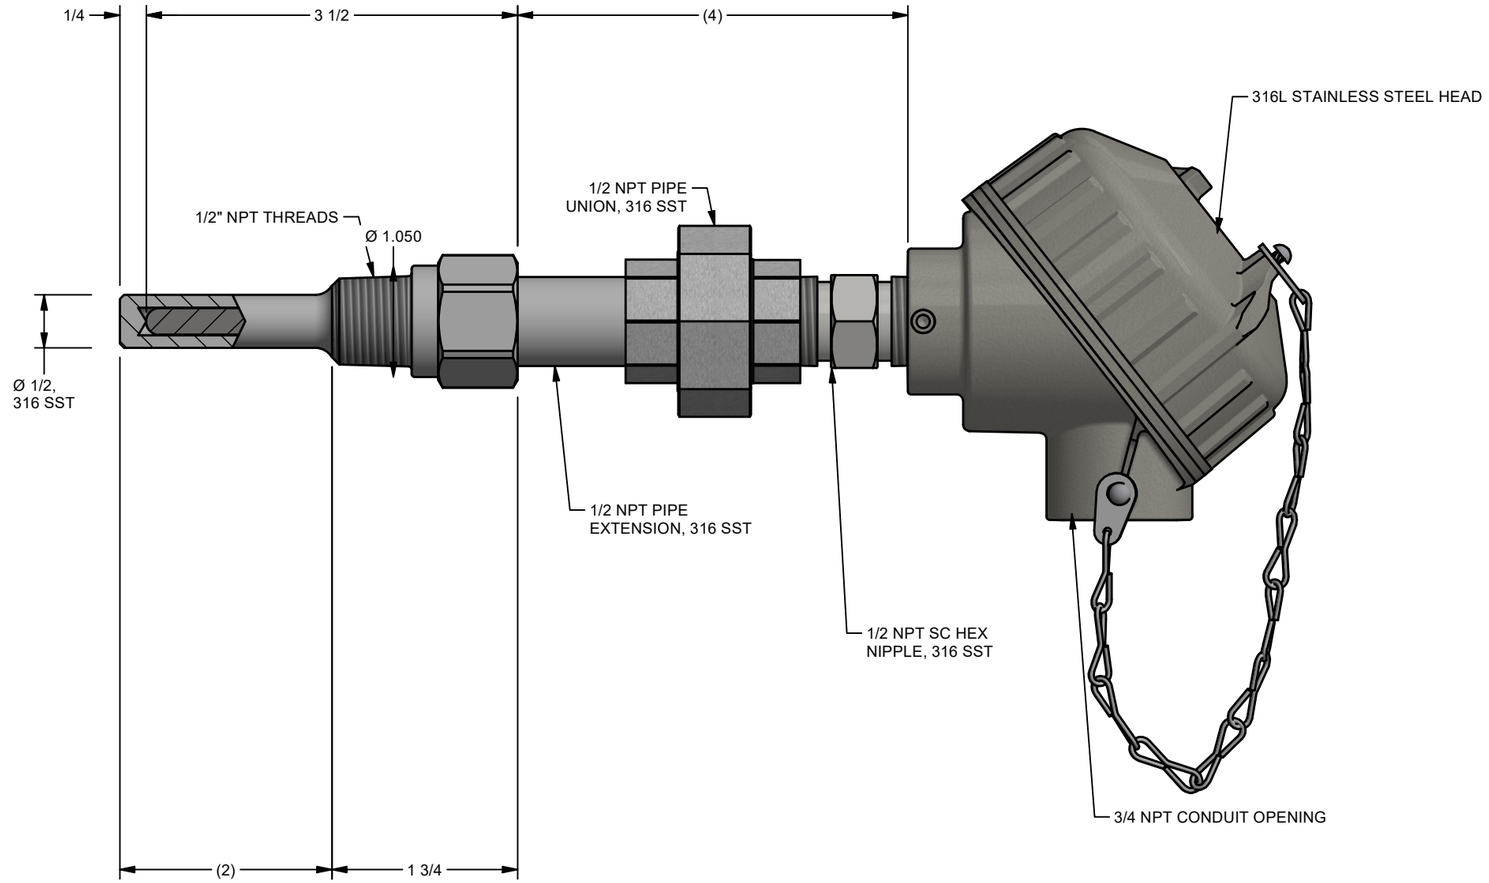

TAGGING:

STAMPING:

- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance (1/5) Class B
- Temperature Range -30 to 150 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Duty Threaded (NPT) - 0.260 Bore
- 316 Stainless Steel
- 1/2 Inch NPT Pipe Size
- S Dimension: 3(1/2) Inches
- U Dimension: 2 Inches
- Self-contained Spring-loaded Element
- 1/2 Inch NPT Stainless Steel Union/Nipple
- Extension E Length: 4 Inches
- 316 L Stainless Steel Screw Cover Head - NEMA 4X Rated

CATALOG #: R5T185L483-S4C03(1/2)08-SC-8PU491

	FOR: PYROMATION	
	TITLE: SPRING LOADED SENSOR ASSEMBLY	
	SIZE: B	DWG. NO. & SHEET NO: 10001038279 REV.
TOLERANCES	DRAWN BY: GP03	DATE: 10/25/2023
FRACTION DIM = DECIMAL DIM .XX = DECIMAL DIM .XXX = ANGULAR DIM =	pyromation beyond measure FORT WAYNE, INDIANA 260-484-2580	

This document is PROPRIETARY to Pyromation