




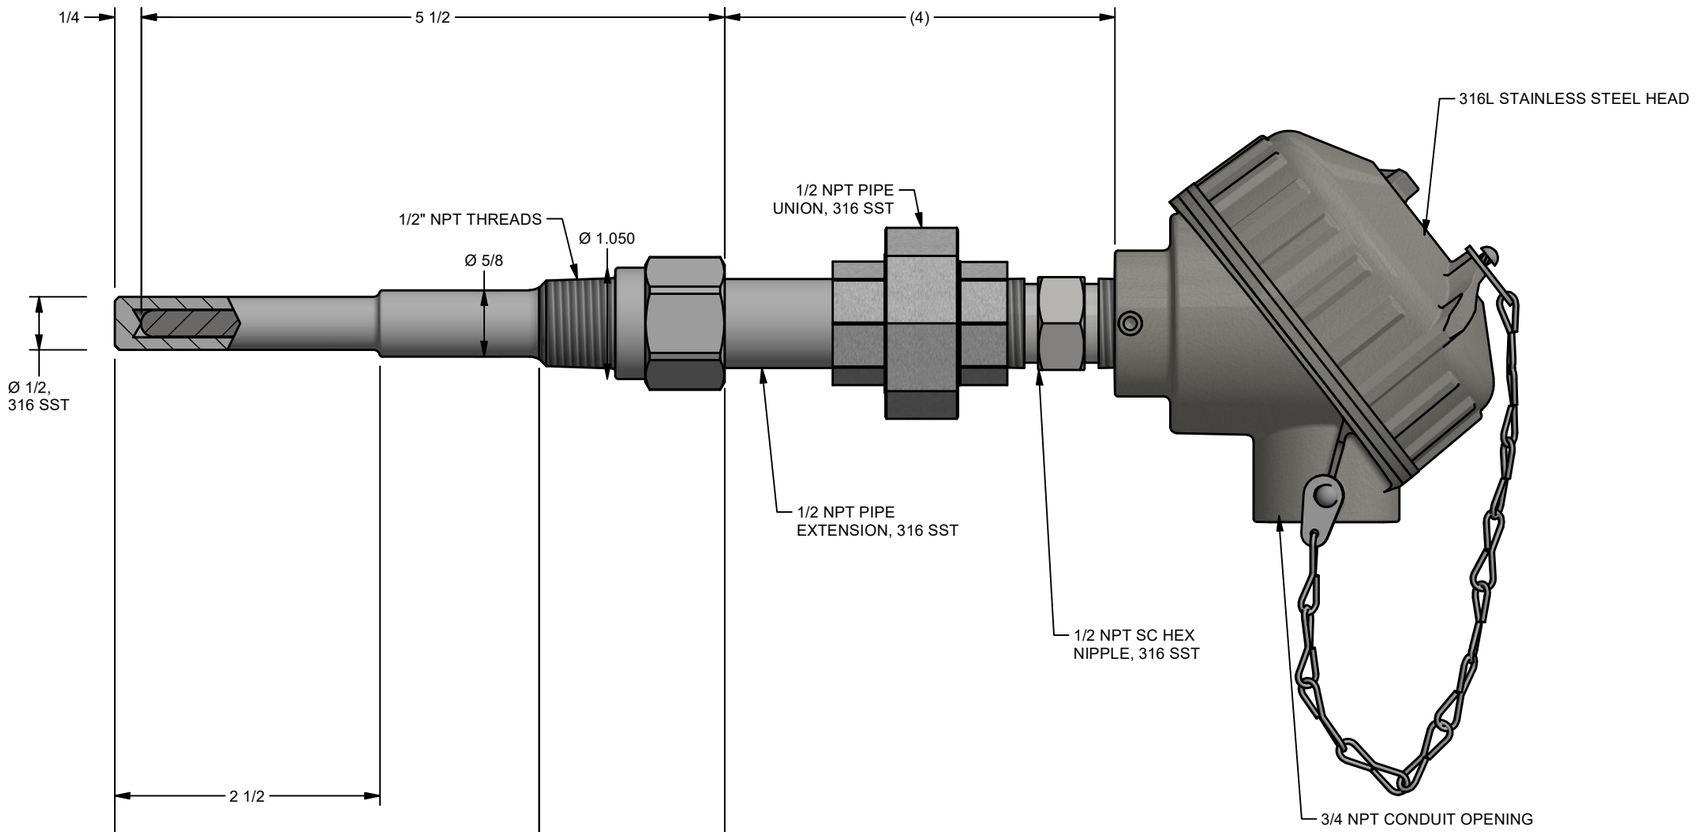

TAGGING:

STAMPING:

- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance (1/5) Class B
- Temperature Range -30 to 150 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Duty Threaded (NPT) - 0.260 Bore
- 316 Stainless Steel
- 1/2 Inch NPT Pipe Size
- S Dimension: 5(1/2) Inches
- U Dimension: 4 Inches
- Self-contained Spring-loaded Element
- 1/2 Inch NPT Stainless Steel Union/Nipple
- Extension E Length: 4 Inches
- 316 L Stainless Steel Screw Cover Head - NEMA 4X Rated

CATALOG #: R5T185L483-S4C05(1/2)08-SC-8PU491

| | | |
|---|---|---|
| | FOR: PYROMATION | |
| | TITLE: SPRING LOADED SENSOR ASSEMBLY | |
| TOLERANCES | SIZE: B | DWG. NO. & SHEET NO: 10001038280 REV. |
| FRACTION DIM =<br>DECIMAL DIM .XX =<br>DECIMAL DIM .XXX =<br>ANGULAR DIM = | DRAWN BY: GP03 | DATE: 10/25/2023 |
| This document is PROPRIETARY to Pyromation | pyromation beyond measure<br>FORT WAYNE, INDIANA 260-484-2580 | |