
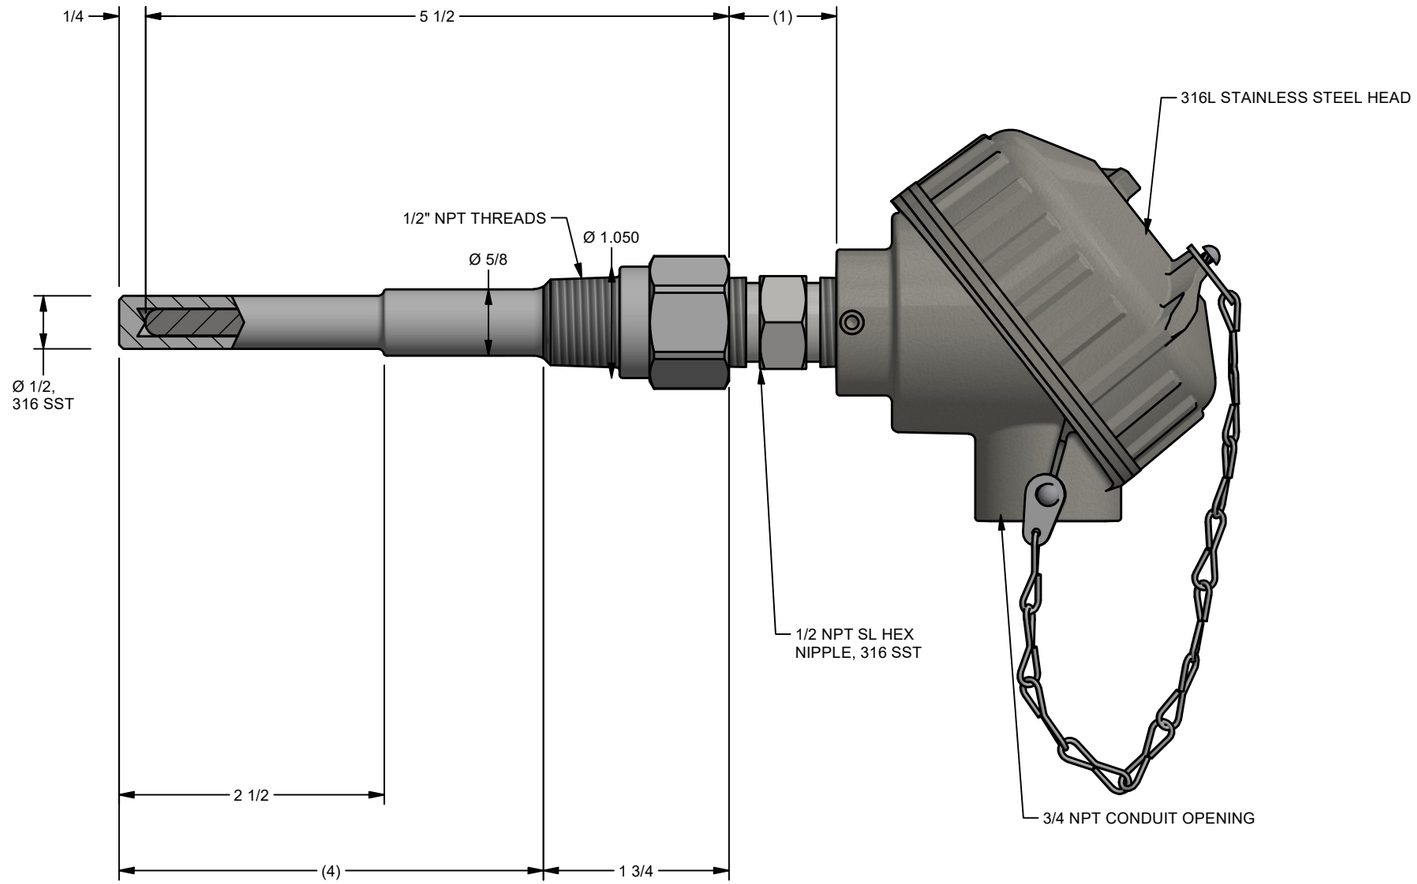




TAGGING:

STAMPING:

- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance (1/5) Class B
- Temperature Range -30 to 150 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Duty Threaded (NPT) - 0.260 Bore
- 316 Stainless Steel
- 1/2 Inch NPT Pipe Size
- S Dimension: 5(1/2) Inches
- U Dimension: 4 Inches
- Spring-loaded Element
- 1/2 Inch x 1/2 Inch NPT Stainless Steel Hex Nipple
- 316 L Stainless Steel Screw Cover Head - NEMA 4X Rated

CATALOG #: R5T185L483-S4C05(1/2)08-SL-8HN91

	FOR: PYROMATION
	TITLE: SPRING LOADED SENSOR ASSEMBLY
TOLERANCES	SIZE: B — DWG. NO. & SHEET NO: 10386000235 — REV.
FRACTION DIM =	DRAWN BY: GP03 — DATE: 1/25/2023
DECIMAL DIM .XX =	
DECIMAL DIM .XXX =	
ANGULAR DIM =	

This document is PROPRIETARY to Pyromation, Inc.

pyromation inc. beyond measure
FORT WAYNE, INDIANA 260-484-2580