


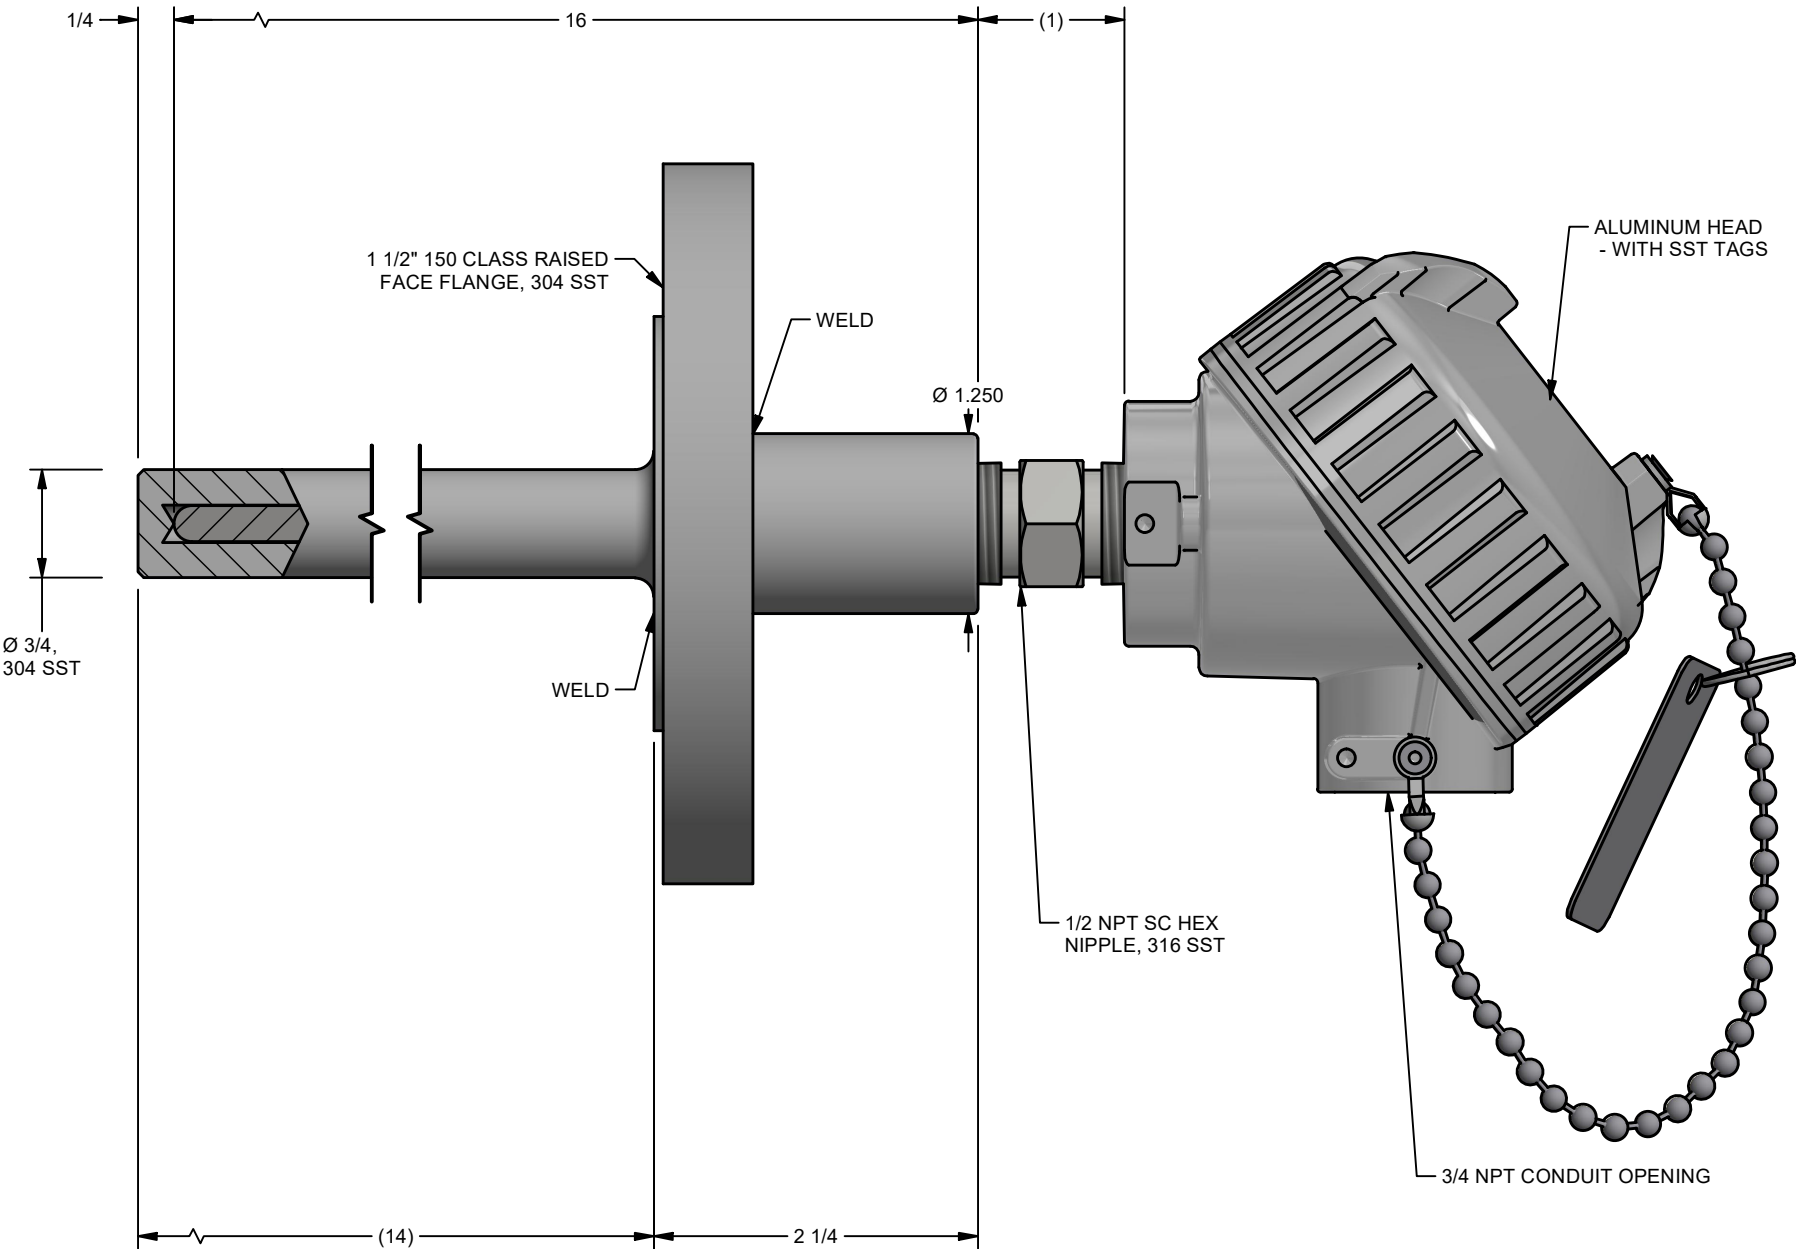

TAGGING:

STAMPING:

- Dual Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Class A
- Temperature Range -30 to 200 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Flanged - 0.260 Bore
- 304 Stainless Steel
- 1(1/2) Inch Flange Size
- Raised Face - 150 Class
- S Dimension: 16 Inches
- U Dimension: 14 Inches
- Customer Specified Part # on Thermowell
- Self-contained Spring-loaded Element
- 1/2 Inch x 1/2 Inch NPT Stainless Steel Hex Nipple
- Aluminum Screw Cover Head - NEMA 4X Rated
- Stainless Steel Tag

CATALOG #: RAF285L483-SF415R11609S-SC-8HN31,I

		FOR: PYROMATION	
		TITLE: SPRING LOADED SENSOR ASSEMBLY	
SIZE: B		DWG. NO. & SHEET NO: 10386000332	REV.
TOLERANCES		DRAWN BY: GP03	DATE: 8/5/2025
FRACTION DIM = DECIMAL DIM .XX = DECIMAL DIM .XXX = ANGULAR DIM =		 beyond measure FORT WAYNE, INDIANA 260-484-2580	
This document is PROPRIETARY to Pyromation			

