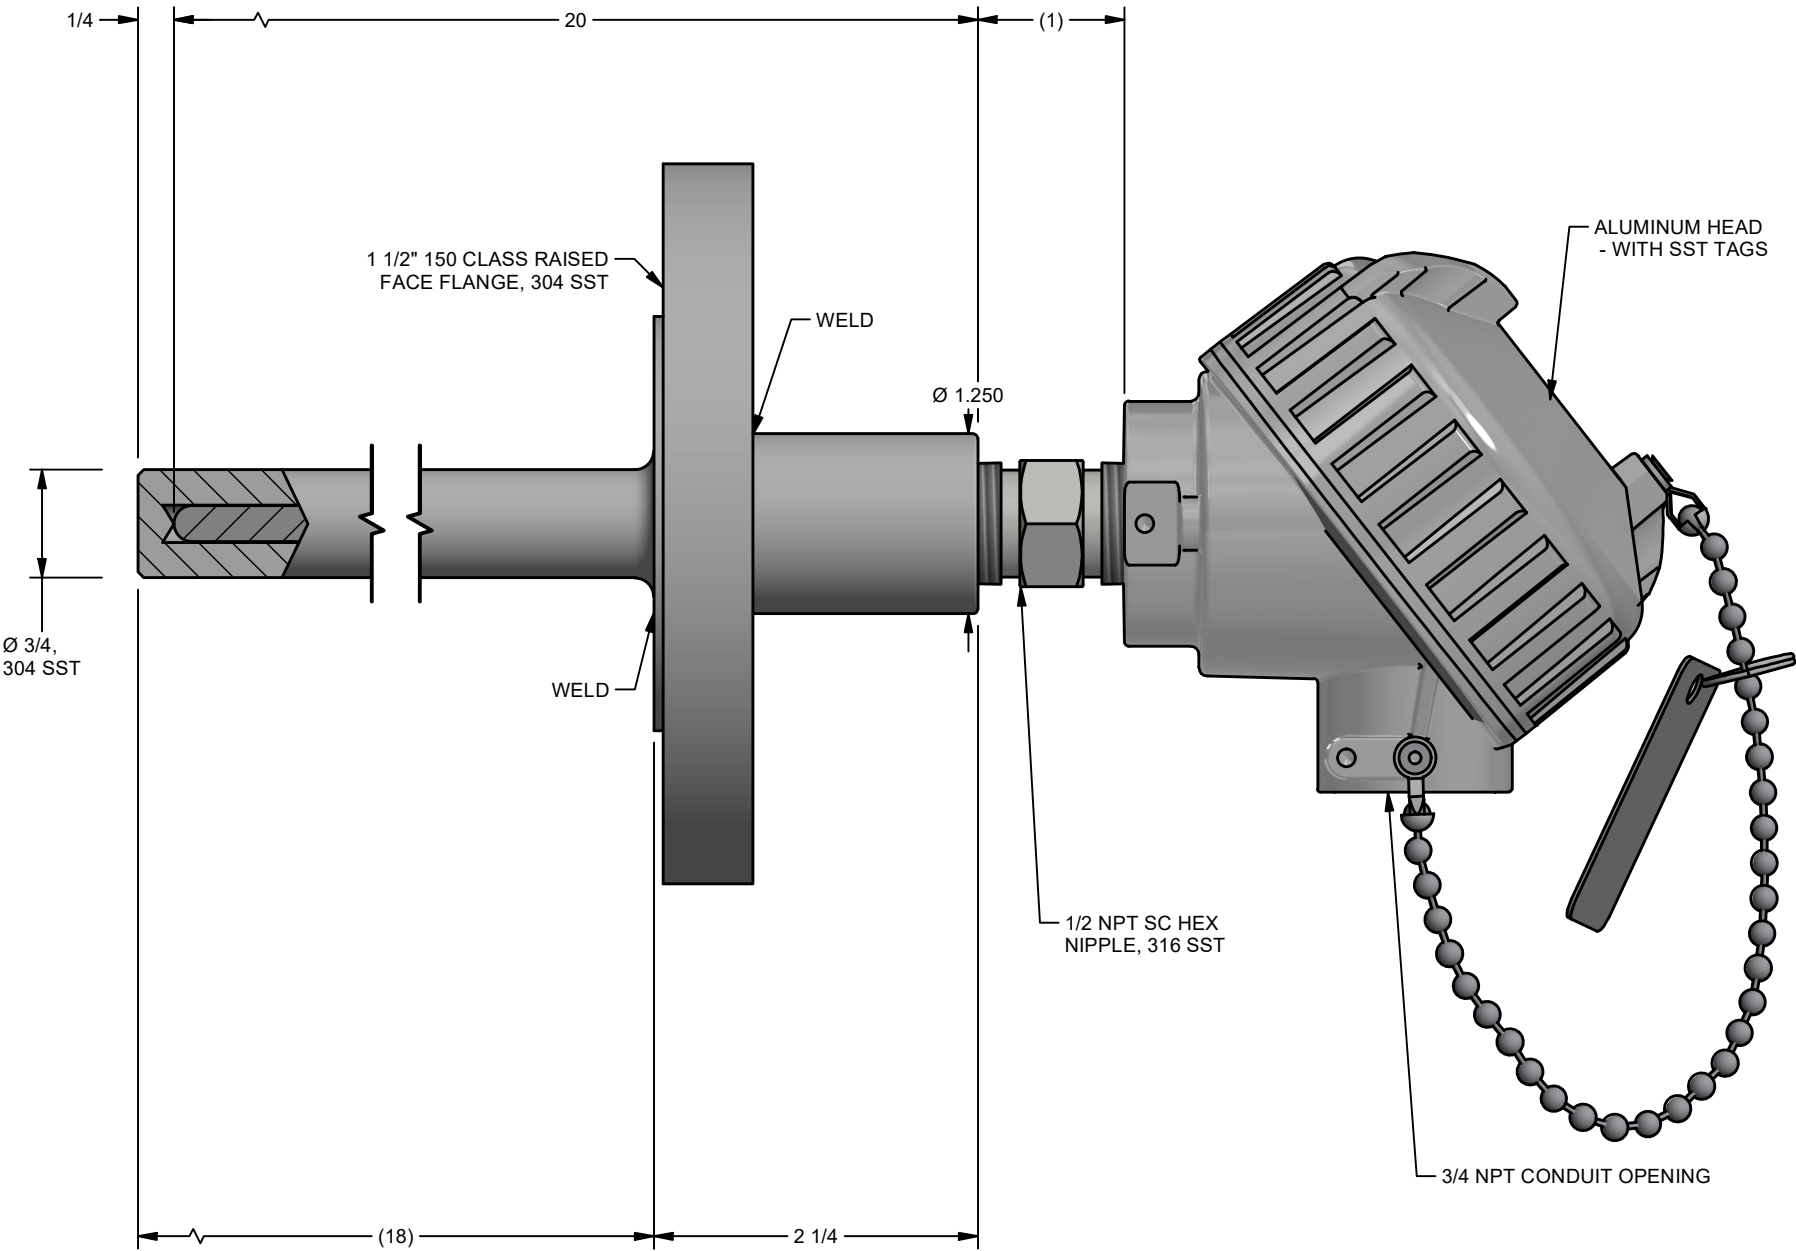


TAGGING:

STAMPING:

- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Class A
- Temperature Range -30 to 200 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Standard Flanged - 0.260 Bore
- 304 Stainless Steel
- 1(1/2) Inch Flange Size
- Raised Face - 150 Class
- S Dimension: 20 Inches
- U Dimension: 18 Inches
- Customer Specified Part # on Thermowell
- Self-contained Spring-loaded Element
- 1/2 Inch x 1/2 Inch NPT Stainless Steel Hex Nipple
- Aluminum Screw Cover Head - NEMA 4X Rated
- Stainless Steel Tag

CATALOG #: RAF185L483-SF415R12009S-SC-8HN31,I

		FOR: PYROMATION	
		TITLE: SPRING LOADED SENSOR ASSEMBLY	
		SIZE: B	DWG. NO. & SHEET NO: 10386000336
TOLERANCES		REV.	
FRACTION DIM =		DRAWN BY: GP03	DATE: 8/6/2025
DECIMAL DIM .XX =		 pyromation beyond measure FORT WAYNE, INDIANA 260-484-2580	
DECIMAL DIM .XXX =			
ANGULAR DIM =			
This document is PROPRIETARY to Pyromation			