

Data Sheet

Threaded Thermowells

FEATURES

- One piece bar stock construction
- Stamped with mil traceable material and heat number
- Testing and certifications including Wake Frequency Calculations per ASME PTC 19.3 TW-2016
- Standard or customized shank dimensions

TYPICAL USES

- Chemical and petrochemical plants
- Water and wastewater temperature control
- Pharmaceutical / Biotech
- Food and beverage



Threaded Thermowells
 1/2", 3/4", 1" threaded sizes

SPECIFICATIONS

Shank Style: Tapered, straight, or stepped

Process Connection Size: 1/2, 3/4, or 1 NPT Male

Instrument Connection: 1/2 NPSM or 1/2 NPT Female

Bore Size: 0.260" or 0.385"

Surface Finish: 16-32 Ra

Lagging: 2" if U-dimension is <3"
 3" if U-dimension is >3"

Cap & Chain: Brass, stainless steel

TABLE 1

OPTIONS	CODE
Stamp tag number on thermowell	NF
SS tag wired to thermowell	NH
Hydrostatic test-internal	W9
Clean for oxygen service	6B
Wake frequency calculation	W5
Material origin restriction	UM

Certificates

Certificate of conformance (per order)	CD-1A
Physical and chemical material test report (MTR's)	W6
Positive material identification (PMI), N/A on carbon steel	MQ
NACE certificate of compliance	CD-5

KEY BENEFITS

- Protects instrument against corrosive effects and physical damage caused by media flow
- Permits instrument interchange or calibration check without disturbing/closing down the process
- Tracing of material origin for quality assurance and control

TABLE 2

MATERIALS	CODE
304 SS	C
316 SS	S
Monel®	M
Hastelloy B/C	G/H
Carpenter 20	D
Chrome Moly F11/F22	FA/FB
Duplex 2205 S/S	J
Super Duplex S32750	SD
Iconel 600	W
Titanium	TI
Carbon Steel	B

Data Sheet

Threaded Thermowells


ORDERING CODE	Example:	75	W	0250	L	H	T	260	S	2	XNH	L0350
P-Process Connection Size												
50 - ½ NPT (N/A with U of 0162)												
75 - ¾ NPT Male 75												
10 - 1 NPT Male												
Thermowell												
W - Thermowell W												
U-Process Insertion Length												
0162 - 1½" (Available only with "M" Process Conn. Type & N/A with ½ NPT)												
0250 - 2½" 0250												
0450 - 4½"												
0750 - 7½"												
1050 - 10½"												
1350 - 13½"												
1650 - 16½"												
1950 - 19½"												
2250 - 22½"												
I-Instrument Connection												
Blank - ½ NPSM												
2 - ½ NPT Female												
T-Lagging												
Blank - No lagging												
L - Lagging (For special lag length, see below) L												
Shank Type												
H - Tapered (N/A with U dimension 0162) H												
S - Straight												
R - Stepped (N/A with U dimension 0162)												
Process Connection Type												
T - NPT Threaded T												
M - Limited space threaded used with 1½" U only												
D-Bore Diameter												
260 - 0.260" 260												
385 - 0.385"												
Material												
AA - Brass												
B - Carbon steel												
C - 304 SS												
S - 316 SS S												
Cap and Chain												
Blank - No cap and chain												
1 - Brass												
2 - SS 2												
Options (see Table 1 on page 1 for additional options (If choosing an option(s) must include an "X")												
NH - SS tag wired to thermowell X NH												
Special Lagging Length												
L - Lagging length × 100 (ex: 3.5" × 100 = L0350) L0350												

Threaded Thermowells


DIMENSIONS

For reference only, consult Ashcroft for specific dimensional drawings


Threaded Straight Thermowell

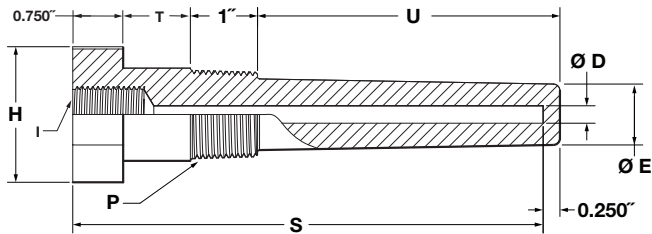


Threaded Stepped Thermowell

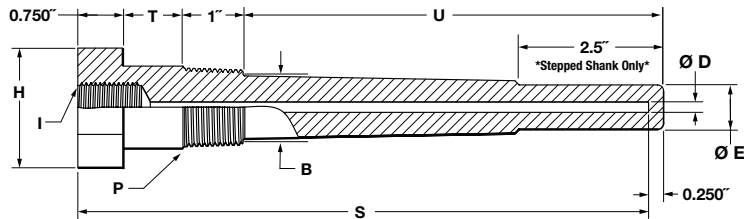

Threaded Tapered Thermowell

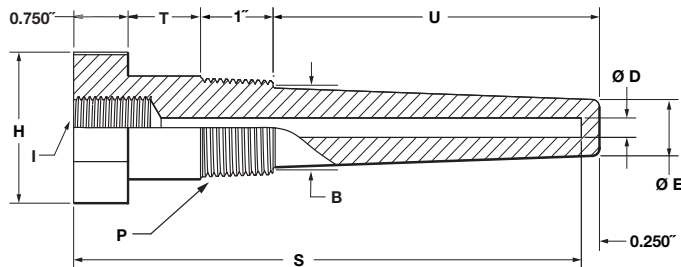

Limited Space

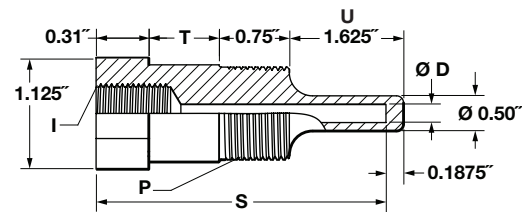

Threaded Straight - 0.260" & 0.385" Bore

P	H	E 0.260" Bore	E 0.385" Bore
1/2"	1.125"	0.50"	0.625"
3/4"	1.125"	0.50"	0.765"
1"	1.375"	0.50"	0.765"

Threaded Stepped - 0.260" & 0.385" Bore

P	H	B	E 0.260" Bore	E 0.385" Bore
1/2"	1.125"	0.625"	0.50"	—
3/4"	1.125"	0.75"	0.50"	0.625"
1"	1.375"	0.875"	0.50"	0.625"

Threaded Tapered - 0.260" & 0.385" Bore

P	H	B	E 0.260" Bore	E 0.385" Bore
1/2"	1.125"	0.625"	0.50"	—
3/4"	1.125"	0.875"	0.625"	0.766"
1"	1.375"	1.06"	0.625"	0.766"

Thermowell Legend

- I - Instrument connection (1/2" NPSM is standard)
- P - Process connection
- T - Lag dimension when required
- B - Root OD
- E - Tip OD
- D - Bore diameter
- U - Insertion depth
- S - Instrument stem length or bore depth
- H - Hex size