
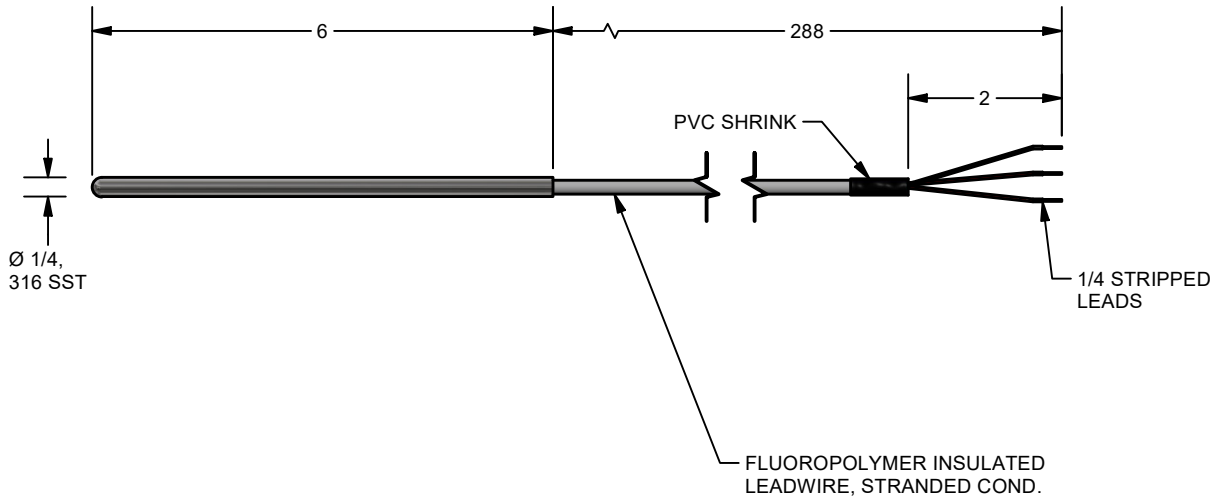


- Single Element RTD
- 100 ohm Platinum
- Temperature Coefficient 0.00385 ohms per Degree C
- Tolerance Class AA
- Temperature Range -50 to 200 Degrees C
- 1/4 Inch Diameter 316 Stainless Steel Sheath
- 3 Wire
- Sheath Length: 6 Inches
- No Fitting or Bend
- Same Size Transition without Heat Shrink Tubing 400 Degrees F
- Leadwire - Fluoropolymer Insulation - Stranded Conductor
- Extension Wire B Length: 288 Inches
- 2 Inch Split Leads 1/4 Inch Stripped



TAGGING:

STAMPING:

CATALOG #: R3T185L483-006-00-18-T3288-2

	FOR: PYROMATION	
	TITLE: RTD ASSEMBLY	
	SIZE: A	DWG. NO. & SHEET NO: 10001011566
		REV.
TOLERANCES	DRAWN BY: RT01	DATE: 07/07/2020
FRACTION DIM = DECIMAL DIM .XX = DECIMAL DIM .XXX = ANGULAR DIM =	pyromation inc. beyond measure FORT WAYNE, INDIANA 260-484-2580	

This document is PROPRIETARY to Pyromation, Inc.