
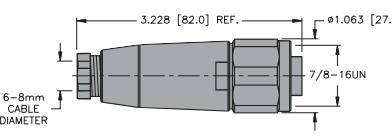

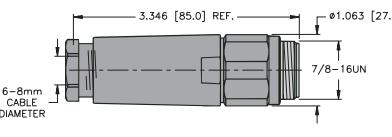


minifast® Field Wireable Connectors with Labels

- Allows for Quick Connection when Pre-Molded Cables are not Available
- Available for Male and Female Connectors
- Color Coded Wire Connection for FOUNDATION fieldbus





Housing Style	Female Part Number	Male Part Number	Features	Pinouts
	BKV 4140-0/11/FF	BSV 4140-0/11/FF	Glass filled nylon, stainless steel coupling nut, PG 9 cable gland, accepts 8-10 mm cable diameter, screw terminals, 90°C, 300 V, 9 A, mates with standard, 4-pin cordsets and receptacles	Female 
	BKV 4140-0/16/FF	BSV 4140-0/16/FF	Glass filled nylon, stainless steel coupling nut, PG 16 cable gland, accepts 12-14 mm cable diameter, screw terminals, 90°C, 600 V, 9 A, mates with standard, 4-pin cordsets and receptacles	Male 

Gender Changer

- Allows Quick and Easy Changes from Male to Female and minifast® to eurofast® Connectors

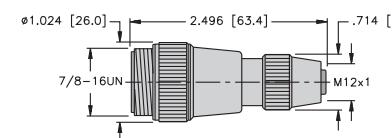

Housing Style	Part Number	Features	Wiring Diagram
	RSM 49-FK 4.4	Nickel plated CuZn or stainless steel, 250 V, 4 A, -40° to +75°C, female eurofast, male minifast, 4-pin	

Pinouts

minifast	eurofast
Male	Female
