

BRANOM INSTRUMENT CO.**LS-BRANOM-1029 SPECIFICATIONS**

DESCRIPTION: 17 5/16" OAL, SS, 1" NPT, THREE LEVEL, S1010.6 FLOAT, COLLARS, 50W SPST, 24" WIRE

MOUNTING FITTING: 1" Stainless Steel NPT Pipe Plug

CONDUIT CONNECTION: 1/2" MNPT

STEM: 5/16" Stainless Steel

ACTUATION:

Level	Actuation	Operation	Float	SG	Stops
L3	2	NC	SS 1010	.60	Set Collar
L2	5	NO	SS 1010	.60	Set Collar
L1	16	NO	SS 1010	.60	Set Collar
OAL	17 5/16				


WIRE: 24" PTFE 22AWG

WIRING: Individual

Level	Type	Reed Switch	Wire Color(s)
L3	SPST	50W-265V-1A	Blue
L2	SPST	50W-265V-1A	Yellow
L1	SPST	50W-265V-1A	Red

Maximum Operating Temperature: 350° F

Maximum Operating Pressure: 300 PSI

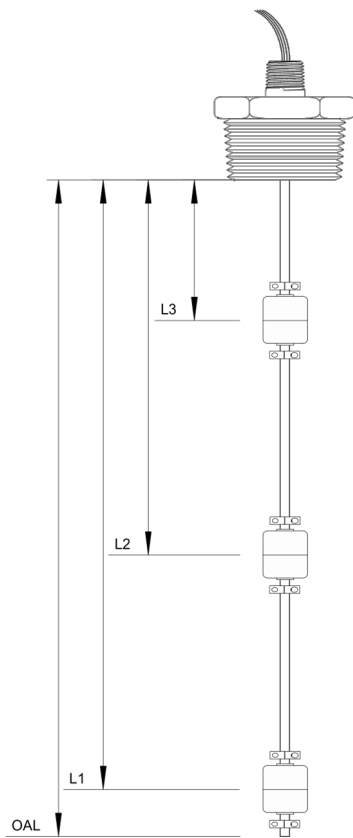

Drawing not to scale

FPI SENSORS INTERNATIONAL
A HIGHER LEVEL OF SATISFACTION

Rev.000	Initial Requirements	04/29/20	Date: 04/29/20	Part: LS-BRANOM-1029
			Tolerances: Decimals: +/- .10" Fractions: +/- 1/16"	This drawing is the property of FPI Sensors. Do not distribute without permission from FPI Sensors.